

**LOCAL PURCHASE DIVISION – PAKISTAN NAVY**

**TERMS & CONDITIONS FOR INVITATION TO TENDERS TO BE OPENED ON 06-05-2026**

1. ALL FIRMS (REGISTERED / UN REGISTERED) REQUIRED TO PAY TENDER FEES @ RS 500/- PER QUOTATION IN SHAPE OF BANK DRAFT / PAY ORDER/ CROSS CHEQUE / ONLINE TRANSFER (NON REFUNDABLE) IN FAVOUR OF “PN NONPUBLIC FUND LP DIVISION IT FUND ACCOUNT” (ACCOUNT NO. PK04 MEZN 0001 7001 0321 0586)
2. IN CASE OF ONLINE PAYMENT, PROOF OF ONLINE DEPOSIT IN ACCOUNT NO. PK04 MEZN 0001 7001 0321 0586 IS TO BE ATTACHED WITH RELEVANT QUOTATION.
3. FURTHERMORE, ALL NON REGISTERED FIRMS ARE TO PAY BG @ 5% OF THE PURCHASE ORDER VALUE, IN SHAPE OF PAY ORDER / BANK DRAFT VALID FOR SIX (6) MONTHS. THEREAFTER PURCHASE ORDER WILL BE ISSUED.
4. TO AVOID PAYMENT OF BG, ALL NON REGISTERED FIRMS ARE ENCOURAGED TO GET THEMSELF REGISTER WITH HQ COMLOG. FOR DETAILS PLEASE CONTACT SO CONTRACT ON 021-48506138.

5. STANDARD DELIVERY TIME OF LOCALLY AVAILABLE ITEMS IS 15 DAYS AND IMPORTED ITEMS IS 45 DAYS.

6. LAB TESTING CHARGES IF ANY WILL BE BORNE BY FIRM.

7. FOR ANY QUERY FIRM MAY CONTACT LOCAL PURCHASE DIVISION, THROUGH TELEPHONE, VIA EMAIL OR WHATSAPP

EMAIL: clp@paknavy.gov.pk, localpurchasedivision@gmail.com

PHONE: 021-48508524, 48508828, 48508720

WHATSAPP NO. 092-322-0188121, 092-341-0201888 (Message Only)

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
1	DGE101 178	N/A	933070518127 9 / PLASTIC SHEET	GENERAL ITEM	16 / ROLL			LOCAL MARKET	GENERAL ITEM		TECHNICAL SPECIFICATION - PLASTIC SHEET TRANSPARENT Size: 1.8 Meter wide, 20 Meter Roll thickness: 01 mm GENERAL SPECIFICATION - PLASTIC SHEET TRANSPARENT Size: 1.8 Meter wide, 20 Meter Roll thickness: 01 mm	
2	DGT101 280	NIL	551070519913 4 / KAIL WOOD SLEEPER GRADE-A (LOCAL)	KAIL WOOD (TIMBER)	55 / CUBIC FOOT	NIL	NIL	LOCAL MARKET	LOCAL MARKET		TECHNICAL SPECIFICATION - size: LENGTH: 8 TO 16 FEET WIDTH: 8 to 14 INCH THICKNESS: 6 to 8 INCHES SPECIFICATIONS: psg: 69 (FOR VISUAL INSPECTION ONLY) moisture contents: 06 % to 18% GENERAL SPECIFICATION - size: LENGTH: 8 TO 16 FEET WIDTH: 8 to 14 INCH THICKNESS: 6 to 8 INCHES SPECIFICATIONS: psg: 69 (FOR VISUAL INSPECTION ONLY) moisture contents: 06 % to 18%	
3	DGB994 89	N /A	471070523246 0 / SS PIPE 38Ø	AIS SPAT 1000A	120 / FOOT	N/A	N/A	SADDAR	PAKISTAN (LOCAL ITEM)		TECHNICAL SPECIFICATION - SS PIPE 38Ø, 03 FEET GENERAL SPECIFICATION - SS PIPE 38Ø, 03 FEET	
4	DGE980 73	611-055	402079515314 3 / ROPE NYLON 16MM WHITE MULTIPLAIT (FLEXABLE AND HIGH	TAL SHIP SAILING RIG	220 / METER			BASELINE MARINE PRODUCTS LTD 10 APPLE INDUSTRIAL ESTATE, WHITTLE AVENUE FAREHAM HAMPSHIRE UNITED KINGDOM PO15 5SX 01489 576349 01489	UK		TECHNICAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2004, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2005(E), 3. ROPE ARE REQUIRED TO BE TESTED AS	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
								578835 BASELINE. MARINE@BTCONNECT.			PER ISO 2307 OF 2005. 4. LENGTH PER COIL: 220 MTR 5. PART NO 611-055 6. TALL SHIP SAILING RIG* GENERAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2004, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2005(E), 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2005. 4. LENGTH PER COIL: 220 MTR 5. PART NO 611-055 6. TALL SHIP SAILING RIG*	
5	DGB99499	39X131	599978514009 1 / WIRE MESH 11X4FEET	HOOPER DECK	140 / EACH/NUMBER	NO DATA AVAILAB LE		CH	CHINA		TECHNICAL SPECIFICATION - MS, 11X4 FEET GENERAL SPECIFICATION - MS, 11X4 FEET	
6	DGE101063	A-A-50162	792000634240 8 / Towel, machinery wiping	0	1 / PACKET	0	0	1333 ISAAC HULL AVE S E, WASHINGTON NAVY YARD, DC	NAVAL SEA SYSTEM S COMMAN D		TECHNICAL SPECIFICATION - GENERAL SPECIFICATION -	
7	DGE99007	A-A-50162	792000634240 8 / Towel, machinery wiping	0	1 / PACKET	0	0	1333 ISAAC HULL AVE S E, WASHINGTON NAVY YARD, DC	NAVAL SEA SYSTEM S COMMAN D		TECHNICAL SPECIFICATION - GENERAL SPECIFICATION -	
8	DGE100944	23-53-21-17-01SA	047670520731 9 / SHOOTER GLOVES	GLOVE	100 / EACH/NUMBER	X-PRO by Alif	NA	M SADIQ ALI & SONS, 217/15, SALEH MARKET, ADAMJEE ROAD, SADDAR, RAWALPINDI. 051-5527252 051-5513958	M SADIQ ALI & SONS		TECHNICAL SPECIFICATION - goatskin leather (abrasion resistant) reinforced palm and double stitching for heavy duty protection from abrasion reinforced digital leather layer with antislip feature and grip for tactical applications durable, lightweight, breathable and comfortable adjustable wrist design (X-PRO by Alif). GENERAL SPECIFICATION - goatskin leather (abrasion resistant) reinforced palm and double stitching for heavy duty protection from abrasion reinforced digital leather layer with antislip	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											feature and grip for tactical applications durable, lightweight, breathable and comfortable adjustable wrist design (X-PRO by Alif).	
9	DGE980 92	100-65F	792099300899 7 / CLEANING LINT FREE CLOTH (GUC ITEM)	CLEANING CLOTH	80 / EACH/N UMBER	NO DATA AVAILAB LE		UK		MEMO HCG/MS D/03/336 DT 2/7/08	<p><b>TECHNICAL SPECIFICATION -</b> Material: 100% polyester made with continuous filament yarn for lowest possible particle generation. Type: Knitted Pattern: Line structure Weight: (250-270) GSM (Calculated with the help of GSN cutting and measuring scale). Colour: White, Blue Absorption: 354.7 g/sqm in water Rate of Absorbency: below 1 second Lint Free: less than 30 counts of 25 micron above particles (Gelbo test method). Cutting: Laser cut sealed edges (+/- 3mm accuracy).</p> <p><b>GENERAL SPECIFICATION -</b> Material: 100% polyester made with continuous filament yarn for lowest possible particle generation. Type: Knitted Pattern: Line structure Weight: (250-270) GSM (Calculated with the help of GSN cutting and measuring scale). Colour: White, Blue Absorption: 354.7 g/sqm in water Rate of Absorbency: below 1 second Lint Free: less than 30 counts of 25 micron above particles (Gelbo test method). Cutting: Laser cut sealed edges (+/- 3mm accuracy).</p>	
10	DGE101 134	100-65F	792099300899 7 / CLEANING LINT FREE CLOTH (GUC ITEM)	CLEANING CLOTH	140 / EACH/N UMBER	NO DATA AVAILAB LE		UK		MEMO HCG/MS D/03/336 DT 2/7/08	<p><b>TECHNICAL SPECIFICATION -</b> Material: 100% polyester made with continuous filament yarn for lowest possible particle generation. Type: Knitted Pattern: Line structure Weight: (250-270) GSM (Calculated with the help of GSN cutting and measuring scale). Colour: White, Blue Absorption: 354.7 g/sqm in water Rate of Absorbency: below 1 second Lint Free: less than 30 counts of 25 micron above particles (Gelbo</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											test method). Cutting: Laser cut sealed edges (+/- 3mm accuracy). <u>GENERAL SPECIFICATION</u> - Material: 100% polyester made with continuous filament yarn for lowest possible particle generation. Type: Knitted Pattern: Line structure Weight: (250-270) GSM (Calculated with the help of GSN cutting and measuring scale). Colour: White, Blue Absorption: 354.7 g/sqm in water Rate of Absorbency: below 1 second Lint Free: less than 30 counts of 25 micron above particles (Gelbo test method). Cutting: Laser cut sealed edges (+/- 3mm accuracy).	
11	DGE101037		042270515841 1 / PVC MAT (SHEET LENGTH 18.5 M, WIDTH 1.5 M, THICKNESS 1.5 MM)	SELF	2550 / SQ FEET			M/S ANWAR PLASTICS, SADDAR KARACHI & M/S BUKHARI PLASTICS MA JINNAH ROAD KARACHI, MOBILENO:021-2764323,0300-2456426.	M/S ANWAR PLASTIC S. SADDAR KARACHI		<u>TECHNICAL SPECIFICATION</u> - SHEET LENGTH= 18.5 M, WIDTH= 1.5 m, THICKNESS= 1.5 MM <u>GENERAL SPECIFICATION</u> - SHEET LENGTH= 18.5 M, WIDTH= 1.5 m, THICKNESS= 1.5 MM	
12	DGH97880	GDHBMK4092040	4010FT1007918 / STEEL WIRE ROPE (20MM/40M/N ON-ROTATING/GALVANIZED)	9M COMBINED BOAT CRANE	13.25 / EACH/NUMBER	GD.HBM. K.S-40/6-PG&40/9	N/A	GURDESAN GEMI MAK. SAN.TIC.A.S. DILOVASI ORGANIZE SAN.BOL.4 NCU KISIM, KOCAELI, TURKEY TEL # 9.02627E+11 FAX # 9.02627E+11 INFO@GURDESAN.COM, TR	GURDESAN GEMI MAK. SAN.TIC. A.S		<u>TECHNICAL SPECIFICATION - A.</u> Length : 40 Meter B. Thickness: Ø20mm C. No. of Wires: 1 D. Safe Working Load: 04 Tons E. Tensile Strength (Mpa): Not held in OEM technical manual F. Minimum Breaking Load: 220 KN G. DIA : 20mm H. Approx Weight (KG/100m): Not held in OEM technical manual <u>GENERAL SPECIFICATION - A.</u> Length : 40 Meter B. Thickness: Ø20mm C. No. of Wires: 1 D. Safe Working Load: 04 Tons E. Tensile Strength (Mpa): Not held in OEM technical manual F. Minimum Breaking Load: 220 KN G. DIA : 20mm H. Approx Weight (KG/100m): Not held in OEM technical manual	
13	DGT101123	NIL	7230705132910 / BAMBOOS OF 35 to 45	-	4340 / FOOT	NO DATA AVAILAB LE		PK	TAWAKA L BANS STORE		<u>TECHNICAL SPECIFICATION - A.</u> DIAMETER AT TOP : 2 TO 3 INCHES B. DIAMETER AT BOTTOM	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			FEETS, diameter: 4"-6"						PLOT NO 26 TIMBER POND KEAMARI ROAD KARACHI		: 4 TO 6 INCHES WALL THICKNESS: 10MM -12MM length: 35 to 45 feet termite treatment : required <u>GENERAL SPECIFICATION - A. DIAMETER AT TOP : 2 TO 3 INCHES B. DIAMETER AT BOTTOM : 4 TO 6 INCHES WALL THICKNESS: 10MM -12MM length: 35 to 45 feet termite treatment :required</u>	
14	DGH647 18	25MM2 4CORE	614570521923 3 / POWER CABLE 25MM2 4CORE, PVC INSULATED PVC SHEATHED (FLEXIBLE)	FAWMIS	300 / FOOT	NA		PAKISTAN CABLES Arif Habib Centre, 1st Floor, 23 M.T. Khan Road, Karachi UAN : 111-CABLES (222- 537) EMAIL : info@pakistancables.com sales@pakistancables.com export@pakistancables. com	PAKISTA N CABLES		<u>TECHNICAL SPECIFICATION -</u> Power Cable 25mm2 4core <u>GENERAL SPECIFICATION -</u> Power Cable 25mm2 4core	
15	DGH855 61	CEF80/SA 2X6MM2	614578513418 9 / 02 CORE CABLE (PER CORE SHEATHED)	ND-14A DC POWER SUPPLY	1566 / METER	NO DATA AVAILAB LE			CH		<u>TECHNICAL SPECIFICATION - -</u> <u>GENERAL SPECIFICATION - -</u>	
16	DGE980 82	NIL	710570514290 9 / MIRROR 2'- 0"X1' -6"/3'-0" X2'-0". AS PER SIZE.	ITSELF	2 / EACH/N UMBER	NO DATA AVAILAB LE			PK	M/S SABRI GLASS WORKS 1067/4, IBNE SINA FURNITU RE MARKET LAIQUAT ABAD, KARACC HI	<u>TECHNICAL SPECIFICATION -</u> SOURCE OF AVAILABILITY:M/S SABRI GLASS WORKS 1067/4,IBNE SINA FURNITURE MARKET LAIQUAITABAD,KARACHI.(PRICE RS.65/=-SQFT) <u>GENERAL SPECIFICATION - SOURCE OF AVAILABILITY:M/S SABRI GLASS WORKS 1067/4,IBNE SINA FURNITURE MARKET LAIQUAITABAD,KARACHI.(PRICE RS.65/=-SQFT)</u>	
17	DGT986 42	NO DATA AVAILABL E	934070514992 2 / MEDIUM DENSITY FIBER BOARD	WOOD WORKS SHIPS&ESTAB LISHMENT	15 / SHEET	NO DATA AVAILAB LE			PK	SOURCE: M/S MEHRAN ART WOOD	<u>TECHNICAL SPECIFICATION -</u> BSEN-622-1 LENGTH 08FEET WIDTH 04 FEET THICKNESS 16MM <u>GENERAL SPECIFICATION -</u>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
			(LASANI) OAK COLOUR LAMINATION BOTH SIDE DENSITY 750kg/cubic meter SIZE: L=8' W=4' TH=16MM						SHOP NO 9, PANJETA NI HOUSE, SIDDIQ WAHAB ROAD, TIMBER MARKET KARACHI . TEL/ FAX: +92-21-32776064 .MOBILE 0322-2578654.		BSEN-622-1 LENGTH 08FEET WIDTH 04 FEET THICKNESS 16MM	
18	DGT101 229	NO DATA AVAILABL E	934070514992 2 / MEDIUM DENSITY FIBER BOARD (LASANI) OAK COLOUR LAMINATION BOTH SIDE DENSITY 750kg/cubic meter SIZE: L=8' W=4' TH=16MM	WOOD WORKS SHIPS&ESTAB LISHMENT	98 / SHEET	NO DATA AVAILAB LE		PK	SOURCE: M/S MEHRAN ART WOOD SHOP NO 9, PANJETA NI HOUSE, SIDDIQ WAHAB ROAD, TIMBER MARKET KARACHI . TEL/ FAX: +92-21-32776064 .MOBILE 0322-2578654.		TECHNICAL SPECIFICATION - BSEN-622-1 LENGTH 08FEET WIDTH 04 FEET THICKNESS 16MM GENERAL SPECIFICATION - BSEN-622-1 LENGTH 08FEET WIDTH 04 FEET THICKNESS 16MM	
19	DGE978 50	828 653-H9020051	801079520819 8 / FABRIC 1300 GSM MILITARY GREY	RHIB BOAT	5 / METER		NIL	HENSHAW INFLATABLES LTD, SOUTHGATE ROAD, WINCANTON,SOMERSET, BA9 9RX, TEL"01963 33237, FAX 01963 34578.	HENSHA W INFLATA BLES LTD		TECHNICAL SPECIFICATION - TDS IS ENCLOSED WITH RWIMSGENERAL SPECIFICATION _TDS IS ENCLOSED WITH RWIMS	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
			(HYPALONE)					EMAIL karen@henshaw.co.uk, www.henshaw.co.uk				
20	DGE88603	ALM7140A	841573513973 6 / DIVING GLOVES	DIVING	15 / PAIR	ISF PROLINE		OC		TIWAN	TECHNICAL SPECIFICATION - SOFT,THICK RUBBER, SIZE: NORMAL SIZE GENERAL SPECIFICATION - SOFT,THICK RUBBER, SIZE: NORMAL SIZE	
21	DGE98084	545	653070522641 1 / SOAP DISH	BATH ROOM	3 / EACH/N UMBER	ARTICLE 545	NA	FAISAL SANITARY FITTING INDUSTRY G.T. ROAD GUJRANWALA 055-4271243-46		FAISAL SANITARY FITTING	TECHNICAL SPECIFICATION - NAGENERAL SPECIFICATION - NA	
22	DGE101026	SNR29 DB	6525TY520256 5 / 3M PRE MOULDED EARPLUGS ULTRA FIT WITH NATURAL COTTON CORD	BV	30 / EACH/N UMBER	NA		VHKMHMN		-	TECHNICAL SPECIFICATION - NIL GENERAL SPECIFICATION - NIL	
23	DGH99075	5510A	403079515388 1 / STAINLESS STEEL WIRE ROPE	TAL SHIP SAILING RIG	193 / METER			BASELINE MARINE PRODUCTS LTD.UNIT 10 APPLE INDUSTRIAL ESTATE.WHITTLE AVENUE.SEGENSWORTH WEST,HAMPSHIRE.PO15 5SX UK.E MAIL: BASELINE.MARINE@BTINTERNET.COM.WEB:WWW.BASELINEHARDWARE.CO.UK		UK	TECHNICAL SPECIFICATION - 7 x 19 stainless steel wire rope flexible (10mm) with minimum breaking strength 5670 kg grade: 316 (A4) marine grade mill test certificate: Required from OEM with bulk supply .GENERAL SPECIFICATION - 7 x 19 stainless steel wire rope flexible (10mm) with minimum breaking strength 5670 kg grade: 316 (A4) marine grade mill test certificate: Required from OEM with bulk supply	
24	DGE97712		561099200438 6 / BAG SAND (LOCAL GOOD QUALITY ACCEPTABLE)	DC & FF	193 / KILOGRAMME	NO DATA AVAILAB LE		UK		FLOWCR ETE UK LTD THE FLOORIN G TECHNO LOGIES CENTRE BOOTH LANE SANDBA	TECHNICAL SPECIFICATION - IN DESCRIPTION ,LOCAL GOOD QUALITY ACEPTABLE, ADDED VIDE FLAG OFFICER SEA TRANING ME/251/544 DT 11 APRIL 2011.&I(M) DC&FF.GENERAL SPECIFICATION - IN DESCRIPTION ,LOCAL GOOD QUALITY ACEPTABLE, ADDED VIDE FLAG OFFICER SEA	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
									TCH CHESHIRE CW11 3QF UK PH:+44(0) 1270 753000 & FAX :+44 (0)1270 753333		TRANING ME/251/544 DT 11 APRIL 2011.&I(M) DC&FF.	
25	DGE101 267	NO DATA AVAILABL E	035059571324 4 / SPUN YARN SISAL "S" TWIST ROT PROOFED, 3/20 YARN, LENGTH PER COIL 811+-5% (FM)		450 / KILOGR AMME						TECHNICAL SPECIFICATION - BS- 2052/65 TABLE 27 GENERAL SPECIFICATION - BS-2052/65 TABLE 27	
26	DGE977 02		043459000968 8 / WASHER THRUST SF 0868 431-7513 SABA		12 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
27	DGE101 405		035059571324 7 / SPUN YARN SISAL S TWIST R. FROOFED 6/20 YARN WT PER COIL 56LB		250 / POUND						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
28	DGE971 76	NO DATA AVAILABL E	035059923357 6 / FENDER MARINE ROUND SISAL WT 71 LBS OVERALL DIA 2'.6 INTERNAL DIA 10"	MARINE ROUND SISAL WT 71 LBS OVERALL DIA 2'.6	8 / EACH/N UMBER						TECHNICAL SPECIFICATION - MARINE ROUND SISAL WT 71 LBS OVERALL DIA 2'.6" INTERNAL DIA 10" GENERAL SPECIFICATION - MARINE ROUND SISAL WT 71 LBS OVERALL DIA 2'.6" INTERNAL DIA 10"	
29	DGE101 179		041359923889 6 / SHEET RUBBER SOLID		40 / KILOGR AMME						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			NATURAL OFF WHITE SQ 02 LBS 0.250 X48X72IN									
30	DGE977 04	NO DATA AVAILABLE	055979444486 1 / INSULATION-SLEEVEING-ELECT-BLUE-4MM		1 / METER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
31	DGE978 41		046150461015 5 / MOP POLISHING DIA 4"X 70"		21 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
32	DGE101 177	319-SIVLER-DE	047659000003 1 / BRUSH STEEL WIRE SURFACE CLEANING SMALL		39 / EACH/NUMBER	319-SILVER-DE					TECHNICAL SPECIFICATION - 1. ITEM WEIGHT: 4.9 OUNCES 2. SIZE: LARGE : 06 INCH 3. COLOR/MATERIAL: STAINLESS STEEL 4. GRIT DESCRIPTION: FINE 5. ADDITIONAL INFO: ASIN B07RP9X98J 6. ITEM WEIGHT: 4.9 OUNCES 7.PRODUCT DIMENSION: L-200mm, W-25mm, T-8mm, Brush Dimension: L-78mm x W-22mm x 15mm 8. MODEL: Wooden handle, Brass/ Steel Wire Brush- 6 Inches/ Can be customized as per user requirement GENERAL SPECIFICATION - 1. ITEM WEIGHT: 4.9 OUNCES 2. SIZE: LARGE : 06 INCH 3. COLOR/MATERIAL: STAINLESS STEEL 4. GRIT DESCRIPTION: FINE 5. ADDITIONAL INFO: ASIN B07RP9X98J 6. ITEM WEIGHT: 4.9 OUNCES 7.PRODUCT DIMENSION: L-200mm, W-25mm, T-8mm, Brush Dimension: L-78mm x W-22mm x 15mm 8. MODEL: Wooden handle, Brass/ Steel Wire Brush- 6 Inches/ Can be customized as per user requirement	
33	DGE101 035	319-SIVLER-DE	047659000003 1 / BRUSH STEEL WIRE		27 / EACH/NUMBER	319-SILVER-DE					TECHNICAL SPECIFICATION - 1. ITEM WEIGHT: 4.9 OUNCES 2. SIZE: LARGE : 06 INCH 3.	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
			SURFACE CLEANING SMALL								COLOR/MATERIAL: STAINLESS STEEL 4. GRIT DESCRIPTION: FINE 5. ADDITIONAL INFO: ASIN B07RP9X98J 6. ITEM WEIGHT: 4.9 OUNCES 7.PRODUCT DIMENSION: L-200mm, W-25mm, T-8mm, Brush Dimension: L-78mm x W-22mm x 15mm 8. MODEL: Wooden handle, Brass/ Steel Wire Brush- 6 Inches/ Can be customized as per user requirement <u>GENERAL SPECIFICATION - 1. ITEM WEIGHT: 4.9 OUNCES 2. SIZE: LARGE : 06 INCH 3. COLOR/MATERIAL: STAINLESS STEEL 4. GRIT DESCRIPTION: FINE 5. ADDITIONAL INFO: ASIN B07RP9X98J 6. ITEM WEIGHT: 4.9 OUNCES 7.PRODUCT DIMENSION: L-200mm, W-25mm, T-8mm, Brush Dimension: L-78mm x W-22mm x 15mm 8. MODEL: Wooden handle, Brass/ Steel Wire Brush- 6 Inches/ Can be customized as per user requirement</u>	
34	DGE977 03		046150461007 5 / WELDERS BURNERS GLASS GREEN (E-1/4927/1322DT :21.07.92)		1 / EACH/NUMBER						<u>TECHNICAL SPECIFICATION - NO DATA AVAILABLE</u> <u>GENERAL SPECIFICATION - NO DATA AVAILABLE</u>	
35	DGE101 180	0413-8522	041359923891 3 / RUBBER SHEET SOLID NATURAL (48 inch X 72 inch x 1/4 inch )	CONT OIL TANKS	90 / KILOGRAMME						<u>TECHNICAL SPECIFICATION - ITEM SPECIFICATION: STANDARD BS 1154</u> <u>GENERAL SPECIFICATION - ITEM SPECIFICATION: STANDARD BS 1154.</u>	
36	DGE977 05	U1901 AND P35M	041459923069 9 / PACKING ASSY MICA SZ.1.5/32,OD. 3/4,I/D 13/64 2 PERSET SQ. C/S		22 / SET						<u>TECHNICAL SPECIFICATION - NO DATA AVAILABLE</u> <u>GENERAL SPECIFICATION - NO DATA AVAILABLE</u>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabilty	Tender Remarks	TECH / GEN SPECS	Dimension
37	DGE978 43	NO DATA AVAILABL E	055979002055 2 / INSULATION TAPE ELECTRICAL SHRINKABLE WD 2IN RUBBER	GENERAL ELECTRIC USE	20 / ROLL						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
38	DGE980 68		035059571303 4 / ROPE COIR, HAWSERLAID, 3-STRAND, CIRC: 3-INCH, DIA: 1-INCH (24-MM)		220 / METER						TECHNICAL SPECIFICATION - 1. BS-2052/65, 2. REQUIRED BREAKING LOAD= 120-130 KG 3. OEM COC REQUIRED. 4. LENGTH PER COIL= 220 METER. GENERAL SPECIFICATION - 1. BS-2052/65, 2. REQUIRED BREAKING LOAD= 120- 130 KG 3. OEM COC REQUIRED, 4. LENGTH PER COIL= 220 METER.	
39	DGE977 11	0413-2556	041359923703 8 / HOSE POLYVINYL PVC INT 0.375 ET 0.77 L 14.5 3PSI WT 3LB S/O"		50 / METER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
40	DGE101 132		035059571303 2 / ROPE COIR HAWSERLAID CIR 2"		400 / FATHO M						TECHNICAL SPECIFICATION - 3 STRD CIR 2" DIA 0.625 MATERIAL COIR (Husk of CoConut) GENERAL SPECIFICATION - 3 STRD CIR 2" DIA 0.625 MATERIAL COIR (Husk of CoConut)	
41	DGE976 12	047694305 57, BS2992TA BLE8ITEM 8/5	047659943055 7 / BRUSH VARNISH TYNEX FIBER FLAT SQUIRE EDGE LENGTH 2.5 INCH, THICK 0.750 INCH	DR CL PS. HIN. SE	28 / EACH/N UMBER						TECHNICAL SPECIFICATION - 2. Dimensions LENGTH 2.5 INCH, THICK 0.750 INCH 3. Shape SQUIRE EDGE 4. Packaging Separately packed/ wrapped/ any suitable GENERAL SPECIFICATION - 2. Dimensions LENGTH 2.5 INCH, THICK 0.750 INCH 3. Shape SQUIRE EDGE 4. Packaging Separately packed/ wrapped/ any suitable	
42	DGE100 966	C-268	047659943055 9 / BRUSH VARNISH TYNEX FLAT SQUARE		16 / EACH/N UMBER						TECHNICAL SPECIFICATION - stock thickness: 01 inch expose length: 3.25 inch specs bs2992 table 8 GENERAL SPECIFICATION - stock thickness: 01 inch expose length:	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			EDGE WD.4								3.25 inch specs bs2992 table 8	
43	DGE101 333		047450474012 6 / SHAMIANA COMPLETE, SIZE: 15X30- FEET		4 / EACH/N UMBER						<p><u>TECHNICAL SPECIFICATION</u> - 1. SIZE= 15X30 FEET 2. MATERIAL= 100% COTTON, 3. SOUND REASONABLY STRAIGHT AND FREE FROM 100% BORER OR INSECT HOLES (GHOON) SPLIT AND RESERVED. 4. BAMBOO OF MATURE STEM, 5. COLOR= ITEM IS REQUIRED IN MULTICOLOR I E (YELLOW/ GREEN/ WHITE) 6. FOLLOWING ACCESSORIES= A. BAMBOO= 06 WITH COVER STANDARD SIZE, B. ROPES= 06 STANDARD SIZE, C. FRILL 02 (15 FEET) &amp; 02 (30 FEET) D. KILLY 04 (IRON ROD), E. IRON HAMPER= 01 IN NOS (WEIGHT 03 KGS WITH WOODEN HANDLE 1.5 FEET LENGTH)<u>GENERAL SPECIFICATION</u> - 1. SIZE= 15X30 FEET 2. MATERIAL= 100% COTTON, 3. SOUND REASONABLY STRAIGHT AND FREE FROM 100% BORER OR INSECT HOLES (GHOON) SPLIT AND RESERVED. 4. BAMBOO OF MATURE STEM, 5. COLOR= ITEM IS REQUIRED IN MULTICOLOR I E (YELLOW/ GREEN/ WHITE) 6. FOLLOWING ACCESSORIES= A. BAMBOO= 06 WITH COVER STANDARD SIZE, B. ROPES= 06 STANDARD SIZE, C. FRILL 02 (15 FEET) &amp; 02 (30 FEET) D. KILLY 04 (IRON ROD), E. IRON HAMPER= 01 IN NOS (WEIGHT 03 KGS WITH WOODEN HANDLE 1.5 FEET LENGTH)</p>	
44	DGB745 21	NO DATA AVAILABL E	028359571142 7 / NAVAL BRASS ROD, HEXAGONAL 0.53 inch	BR 320D 76	13 / METER						<p><u>TECHNICAL SPECIFICATION</u> - SIZE: Across Flats 0.53 inch, weight per foot 0.887(lb) SPECS: BS EN 12163 OF 2011, GRADE CW712R, Material Condition: M, Minimum Running Length upto 07 feet. <u>GENERAL SPECIFICATION</u> - SIZE:</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											Across Flats 0.53 inch, weight per foot 0.887(lb) SPECS: BS EN 12163 OF 2011, GRADE CW712R, Material Condition: M, Minimum Running Length upto 07 feet.	
45	DGE101 133	nil	035059571312 1 / Rope Nylon, Hawser laid, White; 3- Strand, Cir: 1- Inch, Diameter: 8-MM		120 / FATHO M						<p><b>TECHNICAL SPECIFICATION -</b>  SPECIFICATION OF ITEM 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021,  2. TO BE MANUFACTURED/  MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED TEST CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S/BSI TEST CERTIFICATE REQUIRED AS PER ISO 2307 OF 2019. <b>GENERAL SPECIFICATION -</b>  SPECIFICATION OF ITEM 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021,  2. TO BE MANUFACTURED/  MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED TEST CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S/BSI TEST CERTIFICATE REQUIRED AS PER ISO 2307 OF 2019.	
46	DGE992 00	NIL	035059571312 6 / ROPE NYLON, HAWSERLAID WHITE, 3- STRAND, CIRC: 02- INCH, DIA: 16MM (5/8"),		120 / FATHO M	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - 1. STANDARD FOR NYLON EN ISO 1140 OF 2004, ISO 2307 OF 2005 & ISO 9554 OF 2005 WITH CERTIFICATE OF CONFORMITY AND OEM I CERTIFICATE SUPPLY 2. 120 FATHOM per COIL. 3. OEM: COTESI UK GENERAL SPECIFICATION - 1. STANDARD FOR NYLON EN ISO 1140 OF 2004, ISO 2307 OF 2005 & ISO 9554 OF 2005 WITH CERTIFICATE OF CONFORMITY AND OEM I CERTIFICATE SUPPLY 2. 120 FATHOM per COIL. 3. OEM: COTESI UK	
47	DGE976 51		035059571312 8 / ROPE NYLON, HAWSERLAID, 3-STRAND, Z- LAY, NOM DIA: 20MM, (13/16") CIRC: 2.50 INCH, TYPE-1		240 / FATHO M						TECHNICAL SPECIFICATION - 1 TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2 TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3 ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4 OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5 OEM COC REQUIRED, 6 FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7 OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8 LENGTH PER COIL: 120 FATHOM. 9 VALID LLOYD'S	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES. 10. OEM: M/S COTESI <u>GENERAL SPECIFICATION</u> _1 TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021. 2 TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3 ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4 OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5 OEM COC REQUIRED, 6 FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7 OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8 LENGTH PER COIL: 120 FATHOM. 9 VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES. 10. OEM: M/S COTESI	
48	DGE990 12	NO DATA AVAILABL E	041354600479 4 / EAR DEFENDER LARGE SIZE		6 / PAIR	NO DATA AVAILAB LE					<u>TECHNICAL SPECIFICATION - NO DATA AVAILABLE</u> <u>GENERAL SPECIFICATION - NO DATA AVAILABLE</u>	
49	DGB978 69		028359571143 8 / ROD NAVAL BRASS HEX SIZE A/F 1.86 INCH	GENERAL PURPOSE (FOR SHIPS)	1 / METER						<u>TECHNICAL SPECIFICATION - BSEN 12163 OF 1998 GRADE CW 712 R(M)</u> <u>GENERAL SPECIFICATION - BSEN 12163 OF 1998 GRADE CW 712 R(M)</u>	
50	DGB978 56	ADSPEC1 076D	028359571121 7 / ROD ALUMINIUM BRONZE RD DIA 5 INCH		1 / METER						<u>TECHNICAL SPECIFICATION - NO DATA AVAILABLE</u> <u>GENERAL SPECIFICATION - NO DATA AVAILABLE</u>	
51	DGB978		028359571145		1 /						<u>TECHNICAL SPECIFICATION -</u>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
	57		2 / ROD NAVAL BRASS RD DIA.1.62 INCH PT PER MTR 11.52 KG		METER						SPEC.2874, CZ 112M DIA.1.62 INCH PT PER MTR 11.52 KGGENERAL SPECIFICATION - SPEC.2874, CZ 112M DIA.1.62 INCH PT PER MTR 11.52 KG	
52	DGB995 01	SPEC BS 2874 CZ 112M	028359571145 4 / ROD NAVAL BRASS RD DIA1-7/8" WT/FT 10.24LB SPEC BS2874 CZ112M	GENERAL USE	1 / METER						TECHNICAL SPECIFICATION - NO DATA AVAILABLEGENERAL SPECIFICATION - NO DATA AVAILABLE	
53	DGB978 73		028359571145 9 / ROD NAVAL BRASS RD DIA.2.50 INCH WT PER MTR 27.49 KG		0.6 / METER						TECHNICAL SPECIFICATION - BS EN-12183 DESIGNATION: CW- 719R, R-340 SYMBOL: CU ZN 39 SN 1GENERAL SPECIFICATION - BS EN-12183 DESIGNATION: CW- 719R, R-340 SYMBOL: CU ZN 39 SN 1	
54	DGB978 63		028359571147 4 / SHEET- NAVAL- BRASS- ANNEALED 48		14.75 / EACH/N UMBER						TECHNICAL SPECIFICATION - Size: length: 48 inch width: 30 inch thickness: 0.060 inch BS EN:1653 DESIGNATION: CW719 R340GENERAL SPECIFICATION - Size: length: 48 inch width: 30 inch thickness: 0.060 inch BS EN:1653 DESIGNATION: CW719 R340	
55	DGE101 135	NO DATA AVAILABL E	043452000015 6 / LEAD WEIGHT IKG WITH CLAMP TYPE LOCK,T- 40761	DIVING BREATHING APPARATUS T-9651 LARIII	10 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLEGENERAL SPECIFICATION - NO DATA AVAILABLE	
56	DGE101 036	NIL	041359923892 3 / RUBBER SHEET SOLID NATURAL (CLOTH INSERT)		100 / KILOGR AMME						TECHNICAL SPECIFICATION - SPECIFICATION OF ITEM AS PER NMCRL: 1. STRENGTHENING FEATURE= INSERT, 2. STRENGTHENING FEATURE MATERIAL= FABRIC OR FLAX, 3. NONMETALLIC HARDNESS RATING= 42.0 MINIMUM INTERNATIONAL RUBBER HARDNESS DEGREE SCALE AND 50.0 MAXIMUM INTERNATIONAL RUBBER HARDNESS DEGREE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											SCALE, 4. MINIMUM TENSILE STRENGTH= 2500 POUNDS PER SQUARE INCH, 5. WIDTH= 43-INCHES NOMINAL, 6. THICKNESS= 0.031-INCHES NOMINAL, 7. LENGTH= 72-INCHES 8. MATERIAL= RUBBER NATURAL. GENERAL SPECIFICATION - SPECIFICATION OF ITEM AS PER NMCR: 1. STRENGTHENING FEATURE= INSERT, 2. STRENGTHENING FEATURE MATERIAL= FABRIC OR FLAX, 3. NONMETALLIC HARDNESS RATING= 42.0 MINIMUM INTERNATIONAL RUBBER HARDNESS DEGREE SCALE AND 50.0 MAXIMUM INTERNATIONAL RUBBER HARDNESS DEGREE SCALE, 4. MINIMUM TENSILE STRENGTH= 2500 POUNDS PER SQUARE INCH, 5. WIDTH= 43-INCHES NOMINAL, 6. THICKNESS= 0.031-INCHES NOMINAL, 7. LENGTH= 72-INCHES 8. MATERIAL= RUBBER NATURAL.	
57	DGE101034	NIL	041359923892 4 / RUBBER SHEET SOLID NATURAL		100 / KILOGRAMME						TECHNICAL SPECIFICATION - BS 1154 OF 1992 COMPUND Y2 COMPOUND CLASSIFICATION Y-50 Cloth insert, also known as rubber insertion, Thick: 0.063 inch, width: 43 inch, No of PLY: 01 Approx, wt per sq ft: ½ Lbs, tensile strength 17Mpa, Hardness: 50+5-4. Spec: BS 1154 GENERAL SPECIFICATION - BS 1154 OF 1992 COMPUND Y2 COMPOUND CLASSIFICATION Y-50 Cloth insert, also known as rubber insertion, Thick: 0.063 inch, width: 43 inch, No of PLY: 01 Approx, wt per sq ft: ½ Lbs, tensile strength 17Mpa, Hardness: 50+5-4. Spec: BS 1154	
58	DGB99480		021259571021 5 / STRIP-STEEL-		60 / METER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			CARBON-HOT-ROLLED-1INCH TK 3/16" WT PER FT.64LB								AVAILABLE	
59	DGH99182	NO DATA AVAILABLE	0212590017878 / CHANNEL STEEL 12"X3.5" X1/2"		12 / METER						TECHNICAL SPECIFICATION - CHANNEL STEEL 12"X3.5" X 1/2". GENERAL SPECIFICATION - CHANNEL STEEL 12"X3.5" X 1/2".	
60	DGB101246	NO DATA AVAILABLE	0214502140608 / BOLT AND NUTS STEEL FOUNDATION TYPE HEX HD SZ 12.000X0.500 INCH		300 / EACH/NUMBER						TECHNICAL SPECIFICATION - length 12 inch thickness 1/2 inch threaded area 3 inch head HEX PND/Timber Craft Shop (C No 107) specs: DGS 8060 - A, Class - I Material Grade: EN 16 (605 M36) GENERAL SPECIFICATION - length 12 inch thickness 1/2 inch threaded area 3 inch head HEX PND/Timber Craft Shop (C No 107) specs: DGS 8060 - A, Class - I Material Grade: EN 16 (605 M36)	
61	DGB98390	NO DATA AVAILABLE	0214502140587 / BOLTS AND NUTS STEEL HEX HD SZ 2.250X0.500 IN		66 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
62	DGB98423		0214502140611 / BOLT AND NUTS STEEL HEX HEAD SZ 0.750X0.250 IN		8 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
63	DGH97888		0211599230184 / SHEET STEEL CARBON COLD ROLLED ANNEALED SIZE 1830X910X1MM		6 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
64	DGH97894		0211599230196 / SHEET GI ZINC COATED		37 / EACH/NUMBER						TECHNICAL SPECIFICATION - 1. DETAILS SIZE: LENGTH 1800MM, WIDTH 900MM, THICKNESS 02MM,	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			1800X900X02 MM								<p>WT/SOFT 1.4 KG. WT/SHEET 26 KG GALVANIZED STEEL SHEETS GRADE :JIS G 3302 OR EN 10346 : 2015 SPECIFICATION BSEN 10025 OF 2004, MATERIAL GRADE S 275 JR, ASTM A1063M WITH COATING DESIGNATION Z90. SPECIAL INSTRUCTIONS: (A) MILL TEST CERTIFICATE (MTC) REQUIRED ALONG WITH SUPPLY. THE CERTIFICATE SHOULD HAVE INFORMATION ON MECHANICAL AND CHEMICAL PROPERTIES, STEEL GRADE, BATCH AND HEAT NUMBER ALONG WITH DATE. (B) EACH PLATE SHALL HAVE A SUITABLE STAMP AT A CORNER INDICATING BATCH NUMBER, GRADE AND MANUFACTURER FOR CASE IDENTIFICATION. (C) MATERIAL SHOULD BE FRESHLY ROLLED AND FREE FROM ALL DEFECTS. (D)Sheet GI Zinc coated a. BS EN 10025 of 2004 Grade : s 275 JR b. ASTM A 1063 M with coating designation Z 90 MASS COATING :120-275 G/MM (STANDARD FOR STRUCTURE REPAIRS)GENERAL SPECIFICATION - 1. dETIALS SIZE: LENGTH 1800MM, WIDTH 900MM, THICKNESS 02MM, WT/SOFT 1.4 KG, WT/SHEET 26 KG GALVANIZED STEEL SHEETS GRADE :JIS G 3302 OR EN 10346 : 2015 SPECIFICATION BSEN 10025 OF 2004, MATERIAL GRADE S 275 JR, ASTM A1063M WITH COATING DESIGNATION Z90. SPECIAL INSTRUCTIONS: (A) MILL TEST CERTIFICATE (MTC) REQUIRED ALONG WITH SUPPLY. THE CERTIFICATE SHOULD HAVE INFORMATION ON MECHANICAL AND CHEMICAL PROPERTIES,</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											STEEL GRADE, BATCH AND HEAT NUMBER ALONG WITH DATE. (B) EACH PLATE SHALL HAVE A SUITABLE STAMP AT A CORNER INDICATING BATCH NUMBER, GRADE AND MANUFACTURER FOR CASE IDENTIFICATION. (C) MATERIAL SHOULD BE FRESHLY ROLLED AND FREE FROM ALL DEFECTS. (D)Sheet GI Zinc coated a. BS EN 10025 of 2004 Grade : s 275 JR b. ASTM A 1063 M with coating designation Z 90 MASS COATING :120-275 G/MM (STANDARD FOR STRUCTURE REPAIRS)	
65	DGH978 97	HD-EP05	022259090361 0 / SWIVEL PIECE (MATERIAL: STEEL, SIZE 19mm - 132 mm") (MAKE & ORIGIN: QINGDAO POWERFUL MACHINERY LTD)	ANCHOR CHAIN	2 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
66	DGH978 86		022159571551 4 / CHAIN CABLE 17/16X15IN FM		8 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
67	DGB973 84		026759923510 4 / ELBOW ROUND BLACK 2.50 IN		12 / EACH/N UMBER						TECHNICAL SPECIFICATION - null GENERAL SPECIFICATION - null	
68	DGH978 90		022150221087 3 / CHAIN CABLE 1.312IN		44 / METER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
69	DGH978 96		022259090122 1 / CHAIN LINK JOINING		22 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
70	DGB101032	NO DATA AVAILABLE	027378000942 6 / BLADE HACKSAW SIZE 12IN TP1-32		6 / DOZEN	Eclipse Plus, Griffon.(or any other brand)					TECHNICAL SPECIFICATION - null GENERAL SPECIFICATION - null	
71	DGB99096		027459910465 3 / HAMMER HAND ENGINEER 3.00LBS LG 17.00IN BALL PEIN		2 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
72	DGB98429		021459944042 1 / SCREW MACHINE UNC STEEL BLACK HEX HD SZ 1.000X0.375IN		4 / TEN						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
73	DGB99223		021470000062 4 / BOLT AND NUTS HEAT RESISTING SZ 4.000X0.625 IN		50 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
74	DGB97349	LENGTH. 1.50 INCH PAK PATTERN NO	021459003560 3 / BOLT MACHINE STEEL BLACK BSW HEX HD SZ 1.500X0.187 IN		20 / TEN						TECHNICAL SPECIFICATION - Material Grade EN4140 GENERAL SPECIFICATION - Material Grade EN4140	
75	DGE97175	0330-1225	035059923386 8 / FENDER MARINE LENGTH 9.0 INCHES WIDTH 5.0 INCHES		8 / EACH/NUMBER						TECHNICAL SPECIFICATION - WIDTH: 5.000 INCHES NOMINAL. LENGTH: 9.000 INCHES NOMINAL. SPECIAL FEATURES: CANVAS COVERING FILLED W/KAPOK:FLAT CIRCULAR W/TAB:2 IN NOM O/A HT. GENERAL SPECIFICATION - WIDTH: 5.000 INCHES NOMINAL. LENGTH: 9.000 INCHES NOMINAL. SPECIAL FEATURES: CANVAS COVERING FILLED W/KAPOK:FLAT CIRCULAR W/TAB:2 IN NOM O/A HT.	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
76	DGE101 404	NO DATA AVAILABL E	035059923713 0 / ROPE NYLON HAWSERLAID, DIA: 28-MM, 3- STRAND	MIN BRKG STRENGTH 15.500 TONS UNIT OF	120 / METER	NO DATA AVAILAB LE					<p>TECHNICAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021. 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES.</p> <p>GENERAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021. 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabilty	Tender Remarks	TECH / GEN SPECS	Dimension
											TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES.	
77	DGB983 88		021459003565 1 / BOLT MACHINE STEEL BSW HEX HD SZ 1.000X0. 375 IN		40 / TEN						TECHNICAL SPECIFICATION - MATERIAL GRADE EN 4140GENERAL SPECIFICATION - MATERIAL GRADE EN 4140	
78	DGB101 301	FA 16753 (5120-99- 910-5842)	027679910584 2 / SCREWDRIVE R FLAT POINT BLADE LG 12" TIP WD 1/2 O/A LG18-1/2"		5 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLEGENERAL SPECIFICATION - NO DATA AVAILABLE	
79	DGB746 79	SPEC-BS 2558 GRADE A	027779000243 8 / SPANNER BOX DOUBLE ENDED BA 09X10 LG 04" DRILLED BOR DIA 1/8"		1 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLEGENERAL SPECIFICATION - NO DATA AVAILABLE	
80	DGB973 50		021459003566 1 / BOLT MACHINE STEEL BSW HEX HD SZ 4.000X0. 375 IN		20 / TEN						TECHNICAL SPECIFICATION - NO DATA AVAILABLEGENERAL SPECIFICATION - NO DATA AVAILABLE	
81	DGB972 84		026559423327 0 / NAIL COPPER BOAT 4"X0. 198" ROUND POINT FLAT CSK HEAD		8 / KILOGR AMME						TECHNICAL SPECIFICATION - sPECS: √ Material: Copper √ Round Point Flat CSK Head √ Size: 4"X0. 198" a. Complete item/ store description: 4 Inch Nail Copper b. Packing Details : 10 in One Pack, 6.34 x 4.02 x 0.43 inches c. Availability: Available in local marketGENERAL SPECIFICATION - sPECS: √ Material: Copper √ Round Point Flat CSK Head √ Size: 4"X0. 198" a. Complete item/ store	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											description: 4 Inch Nail Copper b. Packing Details :10 in One Pack, 6.34 x 4.02 x 0.43 inches c. Availability: Available in local market	
82	DGB991 10		027379000411 4 / CUTTER INSULATION REMOVING DIAMETER CAPACITY 0.744IN	USE: PYROTENAX CABLE	6 / EACH/ NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
83	DGH991 61		028150281168 0 / DIVIDER		138 / EACH/ NUMBER						TECHNICAL SPECIFICATION - see attached file GENERAL SPECIFICATION - see attached file	
84	DGB984 28		021459941000 8 / BOLT MACHINE STEEL UNC HEX HD SZ 0.500X3. 500X1.250 IN	BR 320 D/70	2 / TEN						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
85	DGB928 34		021459941001 9 / BOLT MACHINE STEEL UNC class 2a HEX HD SZ 0.625 X3.000X1.500 IN	BR-320 D/78	298 / EACH/ NUMBER						TECHNICAL SPECIFICATION - AISI PD 970:2005, MATERIAL GRADE 708M40/ 42CRM04 AUTHORITY : AS PER BR-320D OEM COC/MTC REQUIRED GENERAL SPECIFICATION - AISI PD 970: 2005, MATERIAL GRADE 708M40/ 42CRM04 AUTHORITY : AS PER BR-320D OEM COC/MTC REQUIRED	
86	DGB983 89		021470000084 2 / WASHER MILD STEEL 0.87IN		58 / EACH/ NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
87	DGB101 273	SPEC; BS1769	026659001603 1 / WASHER FLAT ROUND MILD STEEL O/D1.625*I/D0. 792"THICK0. 128"		40 / KILOGR AMME						TECHNICAL SPECIFICATION - Spec: BS-970 EN 3A GENERAL SPECIFICATION - Spec: BS-970 EN 3A	
88	DGB983 91		021450214079 7 / BOLT STEEL		89 / EACH/ NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
			SCREWED W/O NUTS UNF HEX HD SZ 1.250X0. 375 IN								AVAILABLE	
89	DGB983 04		021450214079 8 / BOLT STEEL SCREWED W/O NUTS UNF HEX HD SZ 2.500X0. 250 IN		72 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
90	DGB984 25		021450214081 9 / STUD BS RD FINISED SCREWED. 50X2.25 INCH		8 / DOZEN						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
91	DGB101 261	MATERIAL GRADE EN 4140	021459941638 8 / BOLT MACHINE STEEL UNC HEX HD 0.75 X12X2 INCH TPI 10 (LOCAL)		116 / EACH/N UMBER						TECHNICAL SPECIFICATION - material specs: PD 970:2005 material GRADE 708M40/42CRM04 OEM COC/mtc REQUIRED GENERAL SPECIFICATION - material specs: PD 970:2005 material GRADE 708M40/42CRM04 OEM COC/mtc REQUIRED	
92	DGB101 310	MATERIAL GRADE EN 4140	021459941638 8 / BOLT MACHINE STEEL UNC HEX HD 0.75 X12X2 INCH TPI 10 (LOCAL)		384 / EACH/N UMBER						TECHNICAL SPECIFICATION - material specs: PD 970:2005 material GRADE 708M40/42CRM04 OEM COC/mtc REQUIRED GENERAL SPECIFICATION - material specs: PD 970:2005 material GRADE 708M40/42CRM04 OEM COC/mtc REQUIRED	
93	DGB101 376		025850258120 3 / COPPER- WIRE-2-MM- DIA		10 / KILOGR AMME						TECHNICAL SPECIFICATION - Dimension/size: Diameter 2mm Specification: Conductivity > 98% Resistivity 0.047 (@20 C) Elongation > 10% Tensile strength > 180 mpa Purity: As per open source in general marine environment 100% purity of copper required 1. Acceptable diameter variation: 0/-0.04 Cross section: 3.0 mm <sup>2</sup> Resistivity Max: 0.01739 Ω x332/m Conductivity	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											Min: 57.5 m/ $\mu$ xmm2 Length related weight: 26.5 kg/1000 m 2. Required minimum copper purity and wire diameter: 99.9 % COPPER PURITY WITH 2MM DIAMETERGENERAL SPECIFICATION - Dimension/size: Diameter 2mm Specification: Conductivity > 98% Resistivity 0.047 (@20 C) Elongation > 10% Tensile strength > 180 mpa Purity: As per open source in general marine environment 100% purity of copper required 1. Acceptable diameter variation: 0/-0.04 Cross section: 3.0 mm2 Resistivity Max: 0.01739 $\mu$ x332/m Conductivity Min: 57.5 m/ $\mu$ xmm2 Length related weight: 26.5 kg/1000 m 2. Required minimum copper purity and wire diameter: 99.9 % COPPER PURITY WITH 2MM DIAMETER	
94	DGB973 86	(SIM)	025770941150 4 / NUT-PLAIN- HEXAGON (BRASS) THREAD UNF SZ .375"LH . 350"		32 / DOZEN						TECHNICAL SPECIFICATION - NO DATA AVAILABLEGENERAL SPECIFICATION - NO DATA AVAILABLE	
95	DGB983 01	CAM-484	021458000101 2 / NUT HEX CAM-484 472TD SZ 18.00MM		16 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLEGENERAL SPECIFICATION - NO DATA AVAILABLE	
96	DGB984 27		021459003285 2 / WASHER FLAT ROUND M.S. HARDENED 0.625X1. 125X0.125IN		2 / TEN						TECHNICAL SPECIFICATION - NO DATA AVAILABLEGENERAL SPECIFICATION - NO DATA AVAILABLE	
97	DGB101 203	NO DATA AVAILABL E	024559245103 3 / COMMODE CHAIR (3 STAR CERAMICS		1 / EACH/N UMBER						TECHNICAL SPECIFICATION - Specifications: L: 16" W: 28" H: 26" Remarks: WHITE COLOR FANCY Company: Master/DaimondGENERAL	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			COMMODE)								SPECIFICATION - Specifications: L: 16" W: 28" H: 26" Remarks: WHITE COLOR FANCY Company: Master/Daimond	
98	DGE97805	0476-1720	0476599244599 / CHAMIOS-LATHER SHEEP SKIN		20 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
99	DGE101040		0462592203363 / TUBING PLASTIC POLYETHYLENE LAY FLAT THICK .010" WIDTH 36" ROLL PACKING.		1000 / METER						TECHNICAL SPECIFICATION - Color: Transparent Size: 0.010" x 36" Denomination: Yard/ meter GENERAL SPECIFICATION - Color: Transparent Size: 0.010" x 36" Denomination: Yard/ meter	
100	DGE101129	NO DATA AVAILABLE	4240505088705 / CAMOUFLAGE NETS, SIZE 26 X 26 FT	TO COVER/CAMOUFLAGE THE 14.5MM GUNS	1 / EACH/NUMBER						TECHNICAL SPECIFICATION - 1. SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D, SAFETY: FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS, FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN, BROWN AND GRAY COMBINATION). 5. COLOUR CODE FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50654D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH & LENGTH: 50 FT WITH CAMOUFLAGE COLOUR, (B). IRON	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>NAILS= 06 STANDARD, (DIAMETER: 01 INCH &amp; LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH, LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED.</p> <p>GENERAL SPECIFICATION - 1. SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D, SAFETY: FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS. FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN, BROWN AND GRAY COMBINATION). 5. COLOUR CODE FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50854D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH &amp; LENGTH: 50 FT WITH CAMOUFLAGE COLOUR. (B). IRON NAILS= 06 STANDARD, (DIAMETER: 01 INCH &amp; LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH, LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED.</p> <p>TECHNICAL SPECIFICATION - 1. SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D, SAFETY:</p>	
101	DGE101 385	NO DATA AVAILABL E	424050508870 5/ CAMOUFLAGE	TO COVER/CAMO FLAGE THE 14.5MM GUNS	1/ EACH/N UMBER							

S. No	LPR No.	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			NETS, SIZE 26 X 26 FT								<p>FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS, FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN, BROWN AND GRAY COMBINATION). 5. COLOUR CODE FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50854D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH &amp; LENGTH: 50 FT WITH CAMOUFLAGE COLOUR (B). IRON NAILS= 06 STANDARD, (DIAMETER: 01 INCH &amp; LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH, LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED.</p> <p>GENERAL SPECIFICATION - 1. SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D, SAFETY: FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS, FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN,</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>BROWN AND GRAY COMBINATION). 5. COLOUR CODE FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50654D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH &amp; LENGTH: 50 FT WITH CAMOUFLAGE COLOUR. (B). IRON NAILS= 06 STANDARD, (DIAMETER: 01 INCH &amp; LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH, LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED.</p>	
102	DGE101 303	NO DATA AVAILABL E	424050508870 5 / CAMOUFLAGE NETS, SIZE 26 X 26 FT	TO COVER/CAMO FLAGE THE 14.5MM GUNS	1 / EACH/N UMBER						<p><u>TECHNICAL SPECIFICATION</u> - 1. SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D. SAFETY: FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS, FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN, BROWN AND GRAY COMBINATION). 5. COLOUR CODE FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50654D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH &amp; LENGTH: 50 FT WITH CAMOUFLAGE COLOUR. (B). IRON NAILS= 06 STANDARD, (DIAMETER: 01 INCH &amp; LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH, LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED. GENERAL SPECIFICATION - 1. SPECIFICATIONS= POLYESTER FABRIC: GRADE: 300D. SAFETY: FIRE RESISTANT, ROT PROOF AND WATER PROOF. 2. MATERIAL COMPOSITION= 100% POLYESTER. 3. LOOP INTERVALS, FOR JOINING MULTIPLE NETS (06 INCHES DISTANCE LOOP TO LOOP). 4. COLOR LIGHT/ DARK GREEN, ROT PROOF WITHOUT USE OF METALLIC OBJECT (WITH COLOR SHADE ARMY GREEN, BROWN AND GRAY COMBINATION). 5. COLOUR CODE FOR MATCHING OF CAMOUFLAGE AND NET SHOULD BE COMBINATION OF FOLLOWING COLOR CODE= (A). EBONY (50654D), (B). ARTICHOKE (9C9177), (C). QUINCY (655949), (D). DARK CHARCOAL (313831). 6. PACKING OF COMPLETE NET ALONGWITH FOLLOWING ACCESSORIES= (A). ROPE= (01 X BUNDLE= DIAMETER: 10MM, CIRC: 1.25-INCH &amp; LENGTH: 50 FT WITH CAMOUFLAGE COLOUR. (B). IRON NAILS= 06 STANDARD, (DIAMETER: 01 INCH &amp; LENGTH: 18 INCH) (C). HAMMER: 01 IN NUMBER. (D). IRON POLE: 01 X 4 ADJUSTABLE (DIA: 06 INCH,</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabilty	Tender Remarks	TECH / GEN SPECS	Dimension
											LENGTH: 08 FT, QTY: 06 IN NOS WITH SEAMLESS OR WELDED.	
103	DGB993 35		471099923761 5 / PIPING COPPER ALLOY SEAMLESS ANNEALED (70/30 CU/NICKL)1- 1/4"	EXT DIA 1.362" INT DIA 1.25" THK 0.092"	10 / METER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
104	DGB981 76	CATLOG- NO.(USA) 42-059- 008WHITE	343971506689 2 / ELECTRODE (WHITE)TUFF COTE CUTTING U/WATER DIA 5/16X18	FOR GENERAL USE	300 / PACKE T						TECHNICAL SPECIFICATION - Size: 3/8" x 18" Polarity: DC Electrode Negative (DCEN) Position: Flat, Horizontal, Vertical, Overhead Type of Arc: Medium, Moderate, Penetration Material: Low Carbon Steels Technique: Use short Arc length with electrode angle 30o +15o, to the line of weld. UTILIZED DURING UNDERWATER WELDING OPERATION. MUST BE AS PER ISO 9000 STANDARD. MUST HAVE WATER PROOF COATING. GENERAL SPECIFICATION - Size: 3/8" x 18" Polarity: DC Electrode Negative (DCEN) Position: Flat, Horizontal, Vertical, Overhead Type of Arc: Medium, Moderate, Penetration Material: Low Carbon Steels Technique: Use short Arc length with electrode angle 30o +15o, to the line of weld. UTILIZED DURING UNDERWATER WELDING OPERATION. MUST BE AS PER ISO 9000 STANDARD. MUST HAVE WATER PROOF COATING.	
105	DGB997 37	CATTLOG NO.(USA) 42-059- 007	343971506689 3 / ELECTRODE CUTTING TYPE SEA CUTT SIZE 5/8"X18" (BLUE)	FOR GENERAL USE	150 / METER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
106	DGB101 210	CATTLOG NO.(USA) 42-059- 007	343971506689 3 / ELECTRODE CUTTING TYPE SEA CUTT SIZE 5/6"X18" (BLUE)	FOR GENERAL USE	150 / METER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
107	DGE980 65		402099923713 7 / ROPE NYLON HAWSERLAID, 3-STRND, Z- LAY, TYPE-1, NOM DIA: 64- MM, CIRC: 08- INCH,	NOR-SHIPS- USE-NASAR	240 / FATHO M						TECHNICAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM, 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES. GENERAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES.	
108	DGE99283		402099923713 7 / ROPE NYLON HAWSERLAID, 3-STRND, Z- LAY, TYPE-1, NOM DIA: 64- MM, CIRC: 08- INCH.	NOR-SHIPS- USE-NASAR	120 / FATHO M						TECHNICAL SPECIFICATION - 1, TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES. <u>GENERAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE</u>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES.	
109	DGE101 305		402099923713 7 / ROPE NYLON HAWSERLAID, 3-STRND, Z- LAY, TYPE-1, NOM DIA: 64- MM, CIRC: 08- INCH,	NOR-SHIPS- USE-NASAR	120 / FATHO M						<p>TECHNICAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021.</p> <p>2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019. 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES.</p> <p>GENERAL SPECIFICATION - 1. TO BE COMPLY WITH THE</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM, 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES.</p>	
110	DGE976 40		402099923713 7 / ROPE NYLON HAWSERLAID, 3-STRND. Z- LAY, TYPE-1, NOM DIA: 64- MM, CIRC: 08- INCH,	NOR-SHIPS- USE-NASAR	66.6 / FATHO M						<p>TECHNICAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM, 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES.GENERAL SPECIFICATION - 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/ RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM, 9. VALID LLOYD'S TEST CERTIFICATE REQUIRED INDICATING BATCH/ LOT NUMBER OR IDENTIFICATION AND WORKING/ BREAKING STRENGTH OF STORES.	
111	DGB101 247	15B108	343900269961 0 / SOLDER WIRE(SOLDER TIN ALLOY) DIA 0.063",TIN 61.5%, LEAD37.53%		17 / POUND						TECHNICAL SPECIFICATION - TIN ALLOY DIA 0.063",TIN 61.5%, LEAD37.53%GENERAL SPECIFICATION - TIN ALLOY DIA 0.063",TIN 61.5%,LEAD37.53%	
112	DGB101 299	1310FF/63 10-ZZ SKF	311000155626 6 / BALL- BEARING ANNULAR SZ 50.00X110. 00X27.00MM	VENT FAN FWD FIRE ROOM/130KVA CUMMINS D/G	1 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILBLEGENERAL SPECIFICATION - NO DATA AVAILBLE	
113	DGH978 91	751F00	343901056094 9 / CLEANER NOZZLE (CLEANER	GAS CUTTING AND WELDING NOZZLE	2 / SET						TECHNICAL SPECIFICATION - L TEC WELDING & CUTTING SYSTEMS EBENEZERGNERAL SPECIFICATION - L TEC WELDING	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
			SET, WELDING)								& CUTTING SYSTEMS EBENEZER	
114	DGB98175	NO DATA AVAILABLE	343971504503 4 / ELECTRODE SEA WELD 5/32X14 IN		1000 / PACKET						<p><u>TECHNICAL SPECIFICATION - a.</u> Detailed Specifications : UW-CS-2 Electrode Welding 5/32 Inches (4.0 mm) b. Technical data : AWS E70XX c. Polarity : DC Electrode Negative (DCEN) d. Position : Flat, Horizontal, Vertical, Overhead e. Type of Arc : Medium, Moderate, Penetration f. Material : Low Carbon Steels g. Technique : Use short Arc length with electrode angle 30 o + 15 o , to the line of weld. 2. Acceptance criteria : Item will be accepted upon technical rep inspection.</p> <p><u>GENERAL SPECIFICATION - a.</u> Detailed Specifications : UW-CS-2 Electrode Welding 5/32 Inches (4.0 mm) b. Technical data : AWS E70XX c. Polarity : DC Electrode Negative (DCEN) d. Position : Flat, Horizontal, Vertical, Overhead e. Type of Arc : Medium, Moderate, Penetration f. Material : Low Carbon Steels g. Technique : Use short Arc length with electrode angle 30 o + 15 o , to the line of weld. 2. Acceptance criteria : Item will be accepted upon technical rep inspection.</p>	
115	DGB101381	MAKITA 9556NB	513076501638 1 / ELECTRIC ANGLE GRINDER DISC TYPE I/P 840W, 11000RPM, LG 271MM		1 / EACH/NUMBER						<p><u>TECHNICAL SPECIFICATION - SPECIFICATION:</u> DEPRESSED CENTER WHEEL: 100MM(4"), WIRE CUP BRUSH: 75MM(3"), ABRASIVE DISC: 100MM(4"), DIAMOND WHEEL: 100MM (4"), INPUT: 840W, NO LOAD SPEED: 11,000 RPM, OVERLENGTH: 271MM (10-5/8"), NET WEIGHT: 1.6KG (3.5 LBS). POWER SUPPLY CORD: 2.5M (8.2 FT)</p> <p><u>GENERAL SPECIFICATION - SPECIFICATION:</u> DEPRESSED CENTER WHEEL: 100MM(4"), WIRE CUP BRUSH: 75MM(3"), ABRASIVE DISC: 100MM(4"), DIAMOND</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											WHEEL: 100MM (4"), INPUT: 840W, NO LOAD SPEED: 11,000 RPM, OVERLENGTH: 271MM (10-5/8"), NET WEIGHT: 1.6KG (3.5 LBS), POWER SUPPLY CORD: 2.5M (8.2 FT)	
116	DGB101 383		513370504927 1 / DRILL BITS SETS 29 PCS	COMMON TOOLS GYRO REPAIRE FACILITY JAPAN	4 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
117	SGB994 08	0254- 254009	473099420313 4 / TEE EQUAL	FOR GENERAL USE	4 / EACH/N UMBER						TECHNICAL SPECIFICATION - TEE EQUAL IS DN 1.5" AND MATERIAL IS EITHER BRASS, BRONZE OR GUN METAL DIMENSION: BORE 1 1/2" material: LEADED GUNMETAL-LG2 tensile strength mpa: 270 material grade: BS-1400 GENERAL SPECIFICATION - TEE EQUAL IS DN 1.5" AND MATERIAL IS EITHER BRASS, BRONZE OR GUN METAL DIMENSION: BORE 1 1/2" material: LEADED GUNMETAL-LG2 tensile strength mpa: 270 material grade: BS-1400	
118	SGB994 09		482099527613 7 / GLOBE VALVE DIA 1- 1/2" GUN METAL (BR320D CLASS/G 0241 TAB 81)	S/W COOLING LINE OF H.P AIR COMPRESSO R	8 / EACH/N UMBER						TECHNICAL SPECIFICATION - METAL GRADE:BR 320D CLASS/G 0241 TAB 81 GENERAL SPECIFICATION - METAL GRADE: BR 320D CLASS/G 0241 TAB 81	
119	DGB101 420		482070504260 7 / Gate valve 6 inch inner dia Cast iron /Mild steel	FOR DOCKYARD POWER HOUSE-	1 / EACH/N UMBER						TECHNICAL SPECIFICATION - a Valve Material : Mild Steel/ Cast Iron b. Inner Dia of valve : 6 Inch c. Testing Procedure : Physical inspection followed by pressure testing at 10 Bar. GENERAL SPECIFICATION - a. Valve Material : Mild Steel/ Cast Iron b. Inner Dia of valve : 6 inch c. Testing Procedure : Physical inspection followed by pressure testing at 10 Bar.	
120	DGE101	nil	533000038292	FUEL OIL	60 /						TECHNICAL SPECIFICATION -	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
	064		2 / PACKING-MATERIAL	SERVICE PMP	METER						SPECIFICATION: CROSS SECTIONAL SHAPE SQUARE, SIZE: 0.250 INCH, MATERIAL: NON-ASBESTOS, TEM UPTO: 400 °C GENERAL SPECIFICATION - SPECIFICATION: CROSS SECTIONAL SHAPE SQUARE, SIZE: 0.250 INCH, MATERIAL: NON-ASBESTOS, TEM UPTO: 400 °C	
121	DGB99221		531059122529 5 / NUT,PLAIN, HEX ZINC PLATED 6X1MM PITCH, 10MM W A/F 5MM H O/A	30MM GUN EARTHING	46 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
122	DGE101124		535000235013 7 / PAPER ABRASIVE 9" X11" WATER PROOF MATERIAL GLASS GRADE 2/0		65 / SHEET						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
123	DGE97853		535073100289 7 / PAPER GARNET SANDING DISC DIA 30" P-80 BONNIN MACHINE	FOR COMBINED DISE & BOBBIN MACHINE	1 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
124	DGT99401	NO DATA AVAILAB LE	553070504293 3 / PLY WOOD NATURAL TEAK FINISH ONE SIDE (NOT ARTIFICIAL), 3PLY, TYPE OF BOND WBP, L=8' W= 4' TH=03mm to 04mm	PRESENTATIO N BOXES FOR VVIPS	160 / SQ FEET						TECHNICAL SPECIFICATION - bs 1088 part 1 & 2 BS 4079 Plywood natural teak finish one side (not artificial), 3ply, type of bond WBP, Length= 8 Ft Width= 4 Ft Core and back ply should of hard wood Thickness of face and back veneer = 0.6mm GENERAL SPECIFICATION - bs 1088 part 1 & 2 BS 4079 Plywood natural teak finish one side (not artificial), 3ply, type of bond WBP, Length= 8 Ft Width= 4 Ft Core and back ply should of hard wood Thickness of face and back veneer =	



S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
125	DGE992 64	MIL-P- 15280	564000237482 7 / INSULATION SLEEVING THERMAL		20 / EACH/N UMBER						0.6mm TECHNICAL SPECIFICATION - mil-p-15280 Sleeve Sizes: LENGTH: 72-INCHES NOMINAL, INNER DIA: 2.625 INCHES NOMINAL, INSULATION Thickness: 0.750 INCHES NOMINAL, COLOR: BLACK, DESIGN FORM: FULL ROUND, SUPPLEMENTARY FEATURES: EXPANDED UNICELLULAR PLASTIC FOAM. GENERAL SPECIFICATION - mil-p-15280 Sleeve Sizes: LENGTH: 72-INCHES NOMINAL, INNER DIA: 2.625 INCHES NOMINAL, INSULATION Thickness: 0.750 INCHES NOMINAL, COLOR: BLACK, DESIGN FORM: FULL ROUND, SUPPLEMENTARY FEATURES: EXPANDED UNICELLULAR PLASTIC FOAM.	
126	DGE992 62	MIL-P- 15280	564000237482 8 / INSULATION SLEEVING THERMAL		40 / EACH/N UMBER						TECHNICAL SPECIFICATION - MIL-P-15280 SLEEVE SIZES: LENGTH: 72-INCHES NOMINAL, INNER DIA: 3.500 INCHES NOMINAL, INSULATION THICKNESS: 0.750 INCHES NOMINAL, COLOR: BLACK, DESIGN FORM: FULL ROUND, SUPPLEMENTARY FEATURES: EXPANDED UNICELLULAR PLASTIC FOAM. GENERAL SPECIFICATION - MIL-P-15280 SLEEVE SIZES: LENGTH: 72-INCHES NOMINAL, INNER DIA: 3.500 INCHES NOMINAL, INSULATION THICKNESS: 0.750 INCHES NOMINAL, COLOR: BLACK, DESIGN FORM: FULL ROUND, SUPPLEMENTARY FEATURES: EXPANDED UNICELLULAR PLASTIC FOAM.	
127	DGE101 182	0413-2184	597099923966 4 / TAP INSULATION ELECT	FOR RED PHASE	30 / EACH/N UMBER						TECHNICAL SPECIFICATION - Brand: OSAKA, NEETO c. Packing details: 10-12 in each packing GENERAL SPECIFICATION	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			ADHESIVE PLASTIC RED W1								- Brand: OSAKA, NEETO c. Packing details: 10-12 in each packing	
128	DGB101050	NO DATA AVAILABLE	626070100190 2 / LAMP HARRICANE W/GLOBE COMPLE 370 RQ SIZE		10 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
129	DGE99080	CHR4440, MIL-I-46852	597000949484 6 / INSULATION TAPE ELECTRIC, ADHESIVE, WD 1		38 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
130	DGE99258	CM6538-000	597070504435 2 / TAPE INSULATING RAYCHEM HVB HEAT SHRINKABLE		20 / EACH/NUMBER						TECHNICAL SPECIFICATION - Material System: Polyolefin Busbar Insulation Technology: Heat Shrink Busbar Insulation Voltage Class: = 36kV Color: Red Busbar Insulation Tape Width: 100mm (3.93 inch) Length of roll: 10 m Operating Temperature Range: -40 to 90 °C Low Halogen: Yes GENERAL SPECIFICATION - Material System: Polyolefin Busbar Insulation Technology: Heat Shrink Busbar Insulation Voltage Class: = 36kV Color: Red Busbar Insulation Tape Width: 100mm (3.93 inch) Length of roll: 10 m Operating Temperature Range: -40 to 90 °C Low Halogen: Yes	
131	DGE97979	CM6538-000	597070504435 2 / TAPE INSULATING RAYCHEM HVB HEAT SHRINKABLE		50 / EACH/NUMBER						TECHNICAL SPECIFICATION - Material System: Polyolefin Busbar Insulation Technology: Heat Shrink Busbar Insulation Voltage Class: = 36kV Color: Red Busbar Insulation Tape Width: 100mm (3.93 inch) Length of roll: 10 m Operating Temperature Range: -40 to 90 °C Low Halogen: Yes GENERAL SPECIFICATION - Material System: Polyolefin Busbar Insulation	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											Technology: Heat Shrink Busbar Insulation Voltage Class: = 36kV Color: Red Busbar Insulation Tape Width: 100mm (3.93 inch) Length of roll: 10 m Operating Temperature Range: -40 to 90 °C Low Halogen: Yes	
132	DGD94218	LG-MP-9482 SR	7310735118939 / MICROWAVE OVEN-LG SHARP WAVES/DAWLANCE & TOSHIBA	MICROWAVE OVEN LG	1 / EACH/NUMBER						<u>TECHNICAL SPECIFICATION</u> - capacity: 36 LITTERs <u>GENERAL SPECIFICATION</u> - capacity: 36 LITTERs	
133	DGE101169	NO DATA AVAILAB LE	0413500000133 / EAR DEFENDER		46 / PAIR	PELTOR H10A/OPTIME 105					<u>TECHNICAL SPECIFICATION</u> - acceptance on delivery or at the time of inspection may be obtained Technical data provided in EN 352-2. Reduces noise levels by ~ 20-30 dB. a. Ear defender medium size (Pic of packing and ear defenders are enclosed) b. Make: PELTOR Model : pletor h10a/OPTIME 105 3M Ear Defender Bilsom Viking Medium Size (HAC Hardwar & Industrial Safety Equip) <u>GENERAL SPECIFICATION</u> - acceptance on delivery or at the time of inspection may be obtained Technical data provided in EN 352-2. Reduces noise levels by ~ 20-30 dB. a. Ear defender medium size (Pic of packing and ear defenders are enclosed) b. Make: PELTOR Model : pletor h10a/OPTIME 105 3M Ear Defender Bilsom Viking Medium Size (HAC Hardwar & Industrial Safety Equip)	
134	DGE78372	NO DATA AVAILAB LE	0413500000134 / EAR DEFENDER LARGE SIZE		15 / PAIR	NO DATA AVAILAB LE					<u>TECHNICAL SPECIFICATION</u> - NO DATA AVAILAB LE <u>GENERAL SPECIFICATION</u> - NO DATA AVAILAB LE	
135	DGE99040	NO DATA AVAILAB LE	0432500000006 / DUST RESPIRATOR		25 / EACH/NUMBER	M 511-N95					<u>TECHNICAL SPECIFICATION</u> - packing: standard Product Name: KN95 Respirator Face Mask Aerosol	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											Type: Non Oil Color: White Size: Universal Exhalation valve: No Strap Attachment: Stapled Adjustable Noise: clip Yes Standard: KN95 China (GB 2626-2006) Filtering Rate: = 95% <u>GENERAL SPECIFICATION -</u> packing: standard Product Name: KN95 Respirator Face Mask Aerosol Type: Non Oil Color: White Size: Universal Exhalation valve: No Strap Attachment: Stapled Adjustable Noise: clip Yes Standard: KN95 China (GB 2626-2006) Filtering Rate: = 95%	
136	DGE101 139	NO DATA AVAILABL E	046150000008 6 / GOGGLE CHIPPING		110 / EACH/N UMBER	NO DATA AVAILAB LE					<u>TECHNICAL SPECIFICATION -</u> Concurrence to CSA Resistance to fogging for use outdoors. Medium Energy Impact: Resists a 6mm; 0.86g at 120 m/s. Resistance to surface damage by fine particles. Liquid droplet protection. Protection against large dust particles at >5 microns Large enough to fit over prescription glasses. Shields the user against gas and fine dust particles of 5 microns in size. Resistant to molten metal and hot solids. Should be suitable for use around high speed particles at extreme temperatures One-size-fits - most along with fire- resistant head band. <u>GENERAL SPECIFICATION -</u> Concurrence to CSA Resistance to fogging for use outdoors. Medium Energy Impact: Resists a 6mm; 0.86g at 120 m/s. Resistance to surface damage by fine particles. Liquid droplet protection. Protection against large dust particles at >5 microns Large enough to fit over prescription glasses. Shields the user against gas and fine dust particles of 5 microns in size. Resistant to molten metal and hot solids. Should be suitable for use	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
137	DGE101 403		8340PK507382 7 / TENT 400 LBS DOUBLE PLY WITH COMPLETE ACCESSORIE S		2 / EACH/N UMBER						around high speed particles at extreme temperatures One-size-fits - most along with fire- resistant head band.  TECHNICAL SPECIFICATION - 1. SIZE/DIMENSION a. TENT SIZE (LENGTH & WIDTH): 20 X 16 FEET (± 3 INCH) b. WALL HEIGHT: 06 FEET (± 2 INCH) c. HEIGHT OF TENT: 12 FEET (± 3 INCH) 2. OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD & INNER FLY WITH DOUBLE FOLD). b. MATERIAL: 475 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF c. COLOR FOR OUTER/ INNER FLY: OLIVE GREEN, COLOR CODE: RAL-6003. d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: PLAIN PARROT GREEN. 3. LIST OF ACCESSORIES a. IRON POLES: QTY 03 NOS (01 x RIDGE POLES, LENGTH 07 FEET & 02 x STANDING POLES, LENGTH 10 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA 50 MM ± 02 MM & THICKNESS 02 MM ± 0.50 MM b. IRON PEGS: QTY 20 NOS, LENGTH 18 INCHES, THICKNESS 20 MM ± 2 MM AND MILD STEEL PIN QTY 28 NOS, LENGTH 06 INCHES. c. ROPE: QTY: 40 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER. MATERIAL: NYLON/COTTON, DIA MINIMUM: 16-MM. d. HAMMER: QTY 01 NO, MATERIAL: MS (MILD STEEL). WEIGHT 05 KGS WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE.	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 02 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 02 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 TOTAL BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAG FOR THE TENT BODY AND 01 FOR THE ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR TO BULK PRODUCTION.</p> <p><b>GENERAL SPECIFICATION - 1.</b>  <b>SIZE/DIMENSION</b>  a. TENT SIZE (LENGTH &amp; WIDTH): 20 X 16 FEET (± 3 INCH)  b. WALL HEIGHT: 06 FEET (± 2 INCH)  c. HEIGHT OF TENT: 12 FEET (± 3 INCH)  <b>2. OTHER SPECIFICATIONS</b>  a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD).  b. MATERIAL: 475 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF.  c. COLOR FOR OUTER/ INNER FLY: OLIVE GREEN, COLOR CODE: RAL-6003.  d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: PLAIN PARROT GREEN.  <b>3. LIST OF ACCESSORIES</b>  a. IRON POLES: QTY 03 NOS (01 x RIDGE POLES, LENGTH 07 FEET &amp; 02 x STANDING POLES, LENGTH 10 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA 50 MM ± 02 MM &amp; THICKNESS 02 MM ± 0.50 MM  b. IRON PEGS: QTY 20 NOS, LENGTH 18 INCHES, THICKNESS 20 MM ± 2 MM AND MILD STEEL PIN QTY 28 NOS, LENGTH 06</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>INCHES. c. ROPE: QTY: 40 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER. MATERIAL: NYLON/COTTON, DIA MINIMUM: 16-MM. d. HAMMER: QTY 01 NO. MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 02 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 02 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 TOTAL BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAG FOR THE TENT BODY AND 01 FOR THE ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR TO BULK PRODUCTION.</p>	
138	DGE101319		8340PK507382 7 / TENT 400 LBS DOUBLE PLY WITH COMPLETE ACCESSORIES		2 / EACH/NUMBER						<p>TECHNICAL SPECIFICATION - 1. SIZE/DIMENSION a. TENT SIZE (LENGTH &amp; WIDTH): 20 X 16 FEET (± 3 INCH) b. WALL HEIGHT: 06 FEET (± 2 INCH) c. HEIGHT OF TENT: 12 FEET (± 3 INCH) 2. OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD), b. MATERIAL: 475 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF. c. COLOR FOR OUTER/ INNER FLY: OLIVE GREEN, COLOR CODE: RAL-6003. d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: PLAIN PARROT GREEN. 3. LIST OF ACCESSORIES a. IRON POLES: QTY 03 NOS (01 x RIDGE</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO.	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>POLES, LENGTH 07 FEET &amp; 02 x STANDING POLES, LENGTH 10 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA 50 MM ± 02 MM &amp; THICKNESS 02 MM ± 0.50 MM b. IRON PEGS: QTY 20 NOS, LENGTH 18 INCHES, THICKNESS 20 MM ±2 MM AND MILD STEEL PIN QTY 28 NOS, LENGTH 06 INCHES, c. ROPE: QTY: 40 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER. MATERIAL: NYLON/COTTON, DIA MINIMUM: 16-MM. d. HAMMER: QTY 01 NO, MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 02 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 02 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 TOTAL BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAG FOR THE TENT BODY AND 01 FOR THE ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR TO BULK PRODUCTION.</p> <p><u>GENERAL SPECIFICATION - 1.</u>  SIZE/DIMENSION a. TENT SIZE (LENGTH &amp; WIDTH): 20 X 16 FEET (± 3 INCH) b. WALL HEIGHT: 06 FEET (± 2 INCH) c. HEIGHT OF TENT: 12 FEET (± 3 INCH) 2. OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD). b.</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>MATERIAL: 475 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF. c. COLOR FOR OUTER/ INNER FLY: OLIVE GREEN. COLOR CODE: RAL-6003. d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: PLAIN PARROT GREEN. 3. LIST OF ACCESSORIES a. IRON POLES: QTY 03 NOS (01 x RIDGE POLES, LENGTH 07 FEET &amp; 02 x STANDING POLES, LENGTH 10 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL). OUTER DIA 50 MM ± 02 MM &amp; THICKNESS 02 MM ± 0.50 MM b. IRON PEGS: QTY 20 NOS. LENGTH 18 INCHES, THICKNESS 20 MM ±2 MM AND MILD STEEL PIN QTY 28 NOS, LENGTH 06 INCHES. c. ROPE: QTY: 40 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER, MATERIAL: NYLON/COTTON, DIA MINIMUM: 16-MM. d. HAMMER: QTY 01 NO, MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 02 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 02 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 TOTAL BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAG FOR THE TENT BODY AND 01 FOR THE ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR TO BULK PRODUCTION.</p>	
139	DGE101 320		834070508791	OLIVE GREEN WATERPROO	1 / EACH/N						TECHNICAL SPECIFICATION - 1.	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			4 / TENT SHELTER P.P 50 X 20 FT (ALONG WITH COMPLETE ACCESSORIES)	F INNER LINNING OF,	NUMBER						<p>SIZE/DIMENSION a. TENT SIZE (LENGTH &amp; WIDTH): 50 X 20 FEET (± 6 INCH) b. HEIGHT OF TENT: 12 FEET (± 2 INCH) c. HEIGHT OF WALL: 07 FEET (± 2 INCH) 2. OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD). b. MATERIAL: 850 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF. c. COLOR FOR OUTER/ INNER FLY: JUNGLE GREEN (COLOR CODE: 3A5F31). d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: ROYAL BLUE. 3. LIST OF ACCESSORIES a. IRON POLES: TOTAL QTY 07 NOS (03 x RIDGE POLES, LENGTH 07 FEET &amp; 04 x STANDING POLES, LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL). OUTER DIA: 50 MM ±02 MM &amp; THICKNESS 02 MM ±0.50 MM. b. IRON PEGS: QTY 34 NOS, LENGTH: 18 INCHES, THICKNESS 20 MM ±2 MM AND MILD STEEL PIN QTY 34 NOS, LENGTH 06 INCHES. c. ROPE: QTY: 48 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER, MATERIAL: NYLON/COTTON, DIA MINIMUM 16 MM. d. HAMMER: QTY 02 NOS, MATERIAL: MS (MILD STEEL). WEIGHT 05 KGS WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 10 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 04 REQUIRED ON BOTH</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 NOS BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAGS FOR TENT BODY AND 01 x FOR ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR BULK PRODUCTION. <u>GENERAL SPECIFICATION - 1.</u></p> <p>SIZE/DIMENSION a. TENT SIZE (LENGTH &amp; WIDTH): 50 X 20 FEET (± 6 INCH) b. HEIGHT OF TENT: 12 FEET (± 2 INCH) c. HEIGHT OF WALL: 07 FEET (± 2 INCH) 2. OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD). b. MATERIAL: 850 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF. c. COLOR FOR OUTER/ INNER FLY: JUNGLE GREEN (COLOR CODE: 3A5F31). d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: ROYAL BLUE. 3. LIST OF ACCESSORIES a. IRON POLES: TOTAL QTY 07 NOS (03 x RIDGE POLES, LENGTH 07 FEET &amp; 04 x STANDING POLES, LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA: 50 MM ±02 MM &amp; THICKNESS 02 MM ±0.50 MM. b. IRON PEGS: QTY 34 NOS, LENGTH: 18 INCHES, THICKNESS 20 MM ±2 MM AND MILD STEEL PIN QTY 34 NOS, LENGTH 06 INCHES. c. ROPE: QTY: 48 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER, MATERIAL: NYLON/COTTON, DIA MINIMUM 16 MM. d. HAMMER: QTY 02 NOS.</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 10 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 04 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED; QTY 03 NOS BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAGS FOR TENT BODY AND 01 x FOR ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR BULK PRODUCTION.</p>	
140	DGE101382		834070508791 4 / TENT SHELTER P.P 50 X 20 FT (ALONG WITH COMPLETE ACCESSORIES)	OLIVE GREEN WATERPROOF INNER LINNING OF,	1 / EACH/NUMBER						<p><u>TECHNICAL SPECIFICATION - 1.</u>  <u>SIZE/DIMENSION</u> a. TENT SIZE (LENGTH &amp; WIDTH): 50 X 20 FEET (± 6 INCH) b. HEIGHT OF TENT: 12 FEET (± 2 INCH) c. HEIGHT OF WALL: 07 FEET (± 2 INCH) 2. <u>OTHER SPECIFICATIONS</u> a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD). b. MATERIAL: 850 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF. c. COLOR FOR OUTER/ INNER FLY: JUNGLE GREEN (COLOR CODE: 3A5F31). d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: ROYAL BLUE. 3. LIST OF ACCESSORIES a. IRON POLES: TOTAL QTY 07 NOS (03 x RIDGE POLES, LENGTH 07 FEET &amp; 04 x STANDING POLES, LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA: 50 MM ±02</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>MM &amp; THICKNESS 02 MM ±0.50  MM. b. IRON PEGS: QTY 34 NOS.  LENGTH: 18 INCHES, THICKNESS  20 MM ±2 MM AND MILD STEEL  PIN QTY 34 NOS, LENGTH 06  INCHES. c. ROPE: QTY: 48 NOS  MINIMUM OR AS RECOMMENDED  BY MANUFACTURER, MATERIAL:  NYLON/COTTON, DIA MINIMUM 16  MM. d. HAMMER: QTY 02 NOS,  MATERIAL: MS (MILD STEEL),  WEIGHT 05 KGS WITH WOODEN  HANDLE LENGTH 1.5 FEET. e.  FLAPPER FOR GROUND=  MATERIAL: POLYPROPYLENE,  180-200 GSM. 4. VENTILATION  FEATURE: WINDOW: 10 (SIZE: 2 x  2 FEET) WITH MOSQUITO  NETTING FOR AIRFLOW AND  DOOR 04 REQUIRED ON BOTH  SIDES OF THE TENT. 5. PACKING  REQUIRED: QTY 03 NOS BAGS  MADE OF CANVAS COTTON (475  GSM), 02 x BAGS FOR TENT BODY  AND 01 x FOR ACCESSORIES. 6.  ADVANCE SAMPLE TO BE  APPROVED BY CINS/ SPECIALIST  END USER PRIOR BULK  PRODUCTION.<b>GENERAL  SPECIFICATION - 1.</b>  SIZE/DIMENSION a. TENT SIZE  (LENGTH &amp; WIDTH): 50 X 20 FEET  (± 6 INCH) b. HEIGHT OF TENT: 12  FEET (± 2 INCH) c. HEIGHT OF  WALL: 07 FEET (± 2 INCH) 2.  OTHER SPECIFICATIONS a. 100%  CANVAS COTTON: DOUBLE FLY  WITH SINGLE FOLD (OUTER FLY  WITH SINGLE FOLD &amp; INNER FLY  WITH DOUBLE FOLD), b.  MATERIAL: 850 GSM OR ABOVE  WITH ROT-PROOF AND  WATERPROOF. c. COLOR FOR  OUTER/ INNER FLY: JUNGLE  GREEN (COLOR CODE: 3A5F31). d.</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: ROYAL BLUE. 3. LIST OF ACCESSORIES a. IRON POLES: TOTAL QTY 07 NOS (03 x RIDGE POLES, LENGTH 07 FEET &amp; 04 x STANDING POLES, LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA: 50 MM ±02 MM &amp; THICKNESS 02 MM ±0.50 MM. b. IRON PEGS: QTY 34 NOS, LENGTH: 18 INCHES, THICKNESS 20 MM ±2 MM AND MILD STEEL PIN QTY 34 NOS, LENGTH 06 INCHES. c. ROPE: QTY: 48 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER, MATERIAL: NYLON/COTTON, DIA MINIMUM 16 MM. d. HAMMER: QTY 02 NOS, MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 10 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 04 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 NOS BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAGS FOR TENT BODY AND 01 x FOR ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR BULK PRODUCTION.</p>	
141	DGE101 266		834070508791 5 / HIGH QUALITY KUWAITI DELUXE TENT 23 X 15 FT	GENERAL PURPOSE	1 / EACH/N UMBER						<p>TECHNICAL SPECIFICATION - 1. SIZE/ DIMENSION a. TENT SIZE (LENGTH &amp; WIDTH): 23 X 15 FEET (± 3 INCH) b. HEIGHT OF TENT: 12 FEET (± 2 INCH) c. HEIGHT OF WALL: 06 FEET (± 2 INCH) 2.</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD). b. MATERIAL: 650 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF. c. COLOR FOR OUTER/ INNER FLY: JUNGLE GREEN (COLOR CODE: 3A5F31). d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: PLAIN PARROT GREEN. 3. LIST OF ACCESSORIES a. IRON POLES: TOTAL QTY 03 NOS (01 x RIDGE POLES, LENGTH 07 FEET &amp; 02 x STANDING POLES, LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA 50 MM ± 02 MM &amp; THICKNESS 02 MM ± 0.50 MM. b. IRON PEGS: QTY 40 NOS, LENGTH 18 INCHES, THICKNESS 20 MM ± 2 MM AND MILD STEEL PIN QTY 24 NOS, LENGTH 06 INCHES. c. ROPE: QTY: 40 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER. MATERIAL: NYLON/COTTON, DIA MINIMUM 16 MM. d. HAMMER: QTY 01 NO, MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS, WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 02 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 02 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 TOTAL BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAG FOR THE TENT BODY AND 01 x FOR THE</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR TO BULK PRODUCTION. GENERAL SPECIFICATION - 1. SIZE/ DIMENSION a. TENT SIZE (LENGTH &amp; WIDTH): 23 X 15 FEET (± 3 INCH) b. HEIGHT OF TENT: 12 FEET (± 2 INCH) c. HEIGHT OF WALL: 06 FEET (± 2 INCH) 2. OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD). b. MATERIAL: 650 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF. c. COLOR FOR OUTER/ INNER FLY: JUNGLE GREEN (COLOR CODE: 3A5F31). d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: PLAIN PARROT GREEN. 3. LIST OF ACCESSORIES a. IRON POLES: TOTAL QTY 03 NOS (01 x RIDGE POLES, LENGTH 07 FEET &amp; 02 x STANDING POLES, LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA 50 MM ± 02 MM &amp; THICKNESS 02 MM ± 0.50 MM. b. IRON PEGS: QTY 40 NOS, LENGTH 18 INCHES, THICKNESS 20 MM ± 2 MM AND MILD STEEL PIN QTY 24 NOS, LENGTH 06 INCHES. c. ROPE: QTY: 40 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER, MATERIAL: NYLON/COTTON, DIA MINIMUM 16 MM. d. HAMMER: QTY 01 NO, MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS, WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE.</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
142	DGE101384		834070508791 5 / HIGH QUALITY KUWAITI DELUXE TENT 23 X 15 FT	GENERAL PURPOSE	1 / EACH/NUMBER						<p>180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 02 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 02 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 TOTAL BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAG FOR THE TENT BODY AND 01 x FOR THE ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR TO BULK PRODUCTION.</p> <p>TECHNICAL SPECIFICATION - 1. SIZE/ DIMENSION a. TENT SIZE (LENGTH &amp; WIDTH): 23 X 15 FEET (± 3 INCH) b. HEIGHT OF TENT: 12 FEET (± 2 INCH) c. HEIGHT OF WALL: 06 FEET (± 2 INCH) 2. OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD). b. MATERIAL: 650 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF. c. COLOR FOR OUTER/ INNER FLY: JUNGLE GREEN (COLOR CODE: 3A5F31). d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: PLAIN PARROT GREEN. 3. LIST OF ACCESSORIES a. IRON POLES: TOTAL QTY 03 NOS (01 x RIDGE POLES, LENGTH 07 FEET &amp; 02 x STANDING POLES, LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA 50 MM ± 02 MM &amp; THICKNESS 02 MM ± 0.50 MM. b. IRON PEGS: QTY 40 NOS, LENGTH 18 INCHES, THICKNESS 20 MM ± 2 MM AND MILD STEEL PIN QTY 24 NOS, LENGTH 06</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>INCHES. c. ROPE: QTY: 40 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER, MATERIAL: NYLON/COTTON, DIA MINIMUM 16 MM. d. HAMMER: QTY 01 NO, MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS, WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 02 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 02 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 TOTAL BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAG FOR THE TENT BODY AND 01 x FOR THE ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR TO BULK PRODUCTION.</p> <p><u>GENERAL SPECIFICATION - 1.</u>  SIZE/ DIMENSION a. TENT SIZE (LENGTH &amp; WIDTH): 23 X 15 FEET (± 3 INCH) b. HEIGHT OF TENT: 12 FEET (± 2 INCH) c. HEIGHT OF WALL: 06 FEET (± 2 INCH) 2. OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD). b. MATERIAL: 650 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF. c. COLOR FOR OUTER/ INNER FLY: JUNGLE GREEN (COLOR CODE: 3A5F31). d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: PLAIN PARROT GREEN. 3. LIST OF ACCESSORIES a. IRON POLES: TOTAL QTY 03 NOS (01 x RIDGE</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>POLES, LENGTH 07 FEET &amp; 02 x STANDING POLES, LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA 50 MM ± 02 MM &amp; THICKNESS 02 MM ± 0.50 MM. b. IRON PEGS: QTY 40 NOS, LENGTH 18 INCHES, THICKNESS 20 MM ± 2 MM AND MILD STEEL PIN QTY 24 NOS, LENGTH 06 INCHES. c. ROPE: QTY: 40 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER, MATERIAL: NYLON/COTTON, DIA MINIMUM 16 MM. d. HAMMER: QTY 01 NO, MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS, WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 02 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 02 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 TOTAL BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAG FOR THE TENT BODY AND 01 x FOR THE ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR TO BULK PRODUCTION.</p>	
143	DGE101306		834070508791 5 / HIGH QUALITY KUWAITI DELUXE TENT 23 X 15 FT	GENERAL PURPOSE	1 / EACH/NUMBER						<p><u>TECHNICAL SPECIFICATION - 1.</u> SIZE/ DIMENSION a. TENT SIZE (LENGTH &amp; WIDTH): 23 X 15 FEET (± 3 INCH) b. HEIGHT OF TENT: 12 FEET (± 2 INCH) c. HEIGHT OF WALL: 06 FEET (± 2 INCH) 2. OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD). b.</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>MATERIAL: 650 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF. c. COLOR FOR OUTER/ INNER FLY: JUNGLE GREEN (COLOR CODE: 3A5F31). d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM. COLOR: PLAIN PARROT GREEN. 3. LIST OF ACCESSORIES a. IRON POLES: TOTAL QTY 03 NOS (01 x RIDGE POLES. LENGTH 07 FEET &amp; 02 x STANDING POLES. LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA 50 MM ± 02 MM &amp; THICKNESS 02 MM ± 0.50 MM. b. IRON PEGS: QTY 40 NOS. LENGTH 18 INCHES, THICKNESS 20 MM ± 2 MM AND MILD STEEL PIN QTY 24 NOS. LENGTH 06 INCHES. c. ROPE: QTY: 40 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER, MATERIAL: NYLON/COTTON, DIA MINIMUM 16 MM. d. HAMMER: QTY 01 NO, MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS, WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 02 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 02 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 TOTAL BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAG FOR THE TENT BODY AND 01 x FOR THE ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR TO BULK PRODUCTION. GENERAL SPECIFICATION - 1.</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>SIZE/ DIMENSION a. TENT SIZE (LENGTH &amp; WIDTH): 23 X 15 FEET (± 3 INCH) b. HEIGHT OF TENT: 12 FEET (± 2 INCH) c. HEIGHT OF WALL: 06 FEET (± 2 INCH) 2. OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD). b. MATERIAL: 650 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF. c. COLOR FOR OUTER/ INNER FLY: JUNGLE GREEN (COLOR CODE: 3A5F31). d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: PLAIN PARROT GREEN. 3. LIST OF ACCESSORIES a. IRON POLES: TOTAL QTY 03 NOS (01 x RIDGE POLES, LENGTH 07 FEET &amp; 02 x STANDING POLES, LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA 50 MM ± 02 MM &amp; THICKNESS 02 MM ± 0.50 MM. b. IRON PEGS: QTY 40 NOS, LENGTH 18 INCHES, THICKNESS 20 MM ±2 MM AND MILD STEEL PIN QTY 24 NOS, LENGTH 06 INCHES. c. ROPE: QTY: 40 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER, MATERIAL: NYLON/COTTON, DIA MINIMUM 16 MM. d. HAMMER: QTY 01 NO, MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS, WITH WOODEN HANDLE LENGTH 1.5 FEET. e. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 02 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 02 REQUIRED ON BOTH</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO .	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 TOTAL BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAG FOR THE TENT BODY AND 01 x FOR THE ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR TO BULK PRODUCTION.	
144	DGE101331		834070508791 6 / TENT MARQUEE UNIVERSAL G S (SIZE 27X19. 6FT) FOLD & FLY TWO (J/GREEN)	GENERAL PURPOSE	1 / EACH/N UMBER						<p>TECHNICAL SPECIFICATION - 1. SIZE/ DIMENSION a. TENT SIZE (LENGTH &amp; WIDTH): 27 X 19.6 FEET (± 3 INCH) b. HEIGHT OF TENT: 12 FEET (± 2 INCH) c. HEIGHT OF WALL: 06 FEET (± 2 INCH) 2. OTHER SPECIFICATIONS a. 100% CANVAS COTTON: DOUBLE FLY WITH SINGLE FOLD (OUTER FLY WITH SINGLE FOLD &amp; INNER FLY WITH DOUBLE FOLD). b. MATERIAL: 650 GSM OR ABOVE WITH ROT-PROOF AND WATERPROOF: c. COLOR FOR OUTER/ INNER FLY: JUNGLE GREEN (COLOR CODE: 3A5F31). d. INNER LINING: MATERIAL: DOSUTI CLOTH, 180-200 GSM, COLOR: PLAIN PARROT GREEN. 3. LIST OF ACCESSORIES a. IRON POLES: TOTAL QTY 03 NOS (01 x RIDGE POLES, LENGTH 07 FEET &amp; 02 x STANDING POLES, LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA 50 MM ±02 MM &amp; THICKNESS 02 MM ±0.50 MM b. IRON PEGS: QTY 24 NOS, LENGTH 18 INCHES, THICKNESS 20 MM ±2 MM AND MILD STEEL PIN QTY 24 NOS, LENGTH 06 INCHES. c. WALL PIPE (LATHI): QTY 24 NOS OF MATERIAL: MS (MILD STEEL), LENGTH 06 FEET, THICKNESS 25 MM. d. ROPE: QTY: 48 NOS MINIMUM OR AS</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>RECOMMENDED BY  MANUFACTURER, MATERIAL:  NYLON/ COTTON, DIA MINIMUM 16  MM. e. HAMMER: QTY 02 NOS,  MATERIAL: MS (MILD STEEL),  WEIGHT 05 KGS WITH WOODEN  HANDLE LENGTH 1.5 FEET. f.  FLAPPER FOR GROUND=  MATERIAL: POLYPROPYLENE,  180-200 GSM. 4. VENTILATION  FEATURE: WINDOW: 06 (SIZE: 2 x  2 FEET) WITH MOSQUITO  NETTING FOR AIRFLOW AND  DOOR 02 REQUIRED ON BOTH  SIDES OF THE TENT. 5. PACKING  REQUIRED: QTY 03 NOS BAGS  MADE OF CANVAS COTTON (475  GSM), 02 x BAGS FOR TENT BODY  AND 01 x FOR ACCESSORIES. 6.  ADVANCE SAMPLE TO BE  APPROVED BY CINS/ SPECIALIST  END USER PRIOR TO BULK  PRODUCTION. <u>GENERAL  SPECIFICATION</u> - 1. SIZE/  DIMENSION a. TENT SIZE  (LENGTH &amp; WIDTH): 27 X 19.6  FEET (± 3 INCH) b. HEIGHT OF  TENT: 12 FEET (± 2 INCH) c.  HEIGHT OF WALL: 06 FEET (± 2  INCH) 2. OTHER SPECIFICATIONS  a. 100% CANVAS COTTON:  DOUBLE FLY WITH SINGLE FOLD  (OUTER FLY WITH SINGLE FOLD &amp;  INNER FLY WITH DOUBLE FOLD).  b. MATERIAL: 650 GSM OR ABOVE  WITH ROT-PROOF AND  WATERPROOF. c. COLOR FOR  OUTER/ INNER FLY: JUNGLE  GREEN (COLOR CODE: 3A5F31). d.  INNER LINING: MATERIAL: DOSUTI  CLOTH, 180-200 GSM, COLOR:  PLAIN PARROT GREEN. 3. LIST OF  ACCESSORIES a. IRON POLES:  TOTAL QTY 03 NOS (01 x RIDGE  POLES, LENGTH 07 FEET &amp; 02 x</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											STANDING POLES, LENGTH 12 FEET WITH JOINTED MALE/ FEMALE). MATERIAL: MS (MILD STEEL), OUTER DIA 50 MM ±02 MM & THICKNESS 02 MM ±0.50 MM b. IRON PEGS: QTY 24 NOS, LENGTH 18 INCHES, THICKNESS 20 MM ±2 MM AND MILD STEEL PIN QTY 24 NOS, LENGTH 06 INCHES. c. WALL PIPE (LATHI): QTY 24 NOS OF MATERIAL: MS (MILD STEEL), LENGTH 06 FEET, THICKNESS 25 MM. d. ROPE: QTY: 48 NOS MINIMUM OR AS RECOMMENDED BY MANUFACTURER. MATERIAL: NYLON/ COTTON, DIA MINIMUM 16 MM. e. HAMMER: QTY 02 NOS, MATERIAL: MS (MILD STEEL), WEIGHT 05 KGS WITH WOODEN HANDLE LENGTH 1.5 FEET. f. FLAPPER FOR GROUND= MATERIAL: POLYPROPYLENE, 180-200 GSM. 4. VENTILATION FEATURE: WINDOW: 06 (SIZE: 2 x 2 FEET) WITH MOSQUITO NETTING FOR AIRFLOW AND DOOR 02 REQUIRED ON BOTH SIDES OF THE TENT. 5. PACKING REQUIRED: QTY 03 NOS BAGS MADE OF CANVAS COTTON (475 GSM), 02 x BAGS FOR TENT BODY AND 01 x FOR ACCESSORIES. 6. ADVANCE SAMPLE TO BE APPROVED BY CINS/ SPECIALIST END USER PRIOR TO BULK PRODUCTION.	
145	DGB98302	NO DATA AVAILAB LE	0214780000880 / NUT HEX 1202 M16GB52 45N SZ 24.00 X14.00 MM	M/E 12V130ZC & ZCA S/M CHISER	30 / EACH/N UMBER	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - NO DATA AVAILAB LE GENERAL SPECIFICATION - NO DATA AVAILAB LE	
146	DGT101279	NO DATA AVAILAB LE	0100000000003 / HARD	SPECE/BSS 1142/1971	222 / SQ	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - NO DATA AVAILAB LE GENERAL SPECIFICATION - NO DATA AVAILAB LE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
		E	BOARD SIZE 12'X4'X1/4"		FEET	LE					SPECIFICATION - NO DATA AVAILABLE	
147	DGT90781	NO DATA AVAILAB E	010000000000 3 / HARD BOARD SIZE 12'X4'X1/4"	SPECE/BSS 1142/1971	144 / SQ FEET	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
148	DGE101268		031050000000 4 / CANVAS COTTON GREY (WD: 24")		40 / METER	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - a. Width 24' b. Weight 340-425 gsm c. Thickness 1-2mm d. Weave Tight weave for water resistance e. Material 100% Cotton with waterproof coating f. Thread Cotton 150-200-Thread per inch g. Waterproof Yes h. Water resistance 1000 mm WEIGHT 24 OZ PER SQ YD ROT PROOF & WATER PROOF MIN TENSILE STRENGTH ON 5X20 CM STRIPS- Specification PS-319 OF 1986 VARIETY NO 7 advance sample will provided to cins for acceptance GENERAL SPECIFICATION - a. Width 24' b. Weight 340-425 gsm c. Thickness 1-2mm d. Weave Tight weave for water resistance e. Material 100% Cotton with waterproof coating f. Thread Cotton 150-200-Thread per inch g. Waterproof Yes h. Water resistance 1000 mm WEIGHT 24 OZ PER SQ YD ROT PROOF & WATER PROOF MIN TENSILE STRENGTH ON 5X20 CM STRIPS- Specification PS-319 OF 1986 VARIETY NO 7 advance sample will provided to cins for acceptance	
149	DGE101127	NO DATA AVAILAB E	031050000000 6 / CANVAS COTTON NATURAL GREY (WD: 36 INCH)		500 / METER	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - SPECIFICATION: Features: Water proof and Rot Proof Width & Length: 36" and 50 Meter roll Weight: 12 OZ per Sq. Yard Colour: Natural Grey GEN SPECS: 1. PS-319 OF 1986 VARIETY NO 2 TABLE 1 2. ADVANCE SAMPLE TO BE APPROVED BY CINS PRIOR BULK SUPPLY GENERAL	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											<p><b>SPECIFICATION - SPECIFICATION:</b> Features: Water proof and Rot Proof Width &amp; Length: 36" and 50 Meter roll Weight: 12 OZ per Sq. Yard Colour: Natural Grey GEN SPECS: 1. PS-319 OF 1986 VARIETY NO 2 TABLE 1 2. ADVANCE SAMPLE TO BE APPROVED BY CINS PRIOR BULK SUPPLY.</p>	
150	DGE995 21	NO DATA AVAILABL E	834050503926 1 / SHAMIANA SIZE 18,X 36. COMPLETE WITH ALL ACCESSORIE S 3 IN NO		4 / EACH/N UMBER						<p><b>TECHNICAL SPECIFICATION - 1.</b> Material: Specification PSG-248, 100% Cotton Cloth. 2. colour: Cedar Green BCC 80. 3. Print: White. (Suitable Print) 4. Rope: PSG-101, 100% Cotton, dia 1 inch Qty 08 in Number Length 25 feet. 5. Iron Pin: 08 in Number, Length 18 inch, dia 1 ¼ inch. 6. Bamboo: PSG-758 &amp; 759, Qty 06 in Number, Min dia at bottom 3.5 &amp; at top 2.5 inch should be Rot proofed (treated with Preservative) Length 12 feet min with 02 spare . 7. Hammer: 05 Lbs with handle. qty 01 8. Handle material: Kahoo/Sissoo or Teak wood of 2.5 feet length, 9. Eyelets brass: PSG-283 10. Leather: PSG-9 (b) Vegetable tanned Leather Piece insert in between (EYE PIECE) the all Caps for Strengthening. 11. COMPLETE ACCESSORIES: Jhaler : 06 in Nos Ropes : 06 in Nos Nails: 06 in Nos Hammer: 01 in Nos Bamboo: 06 in Nos <b>GENERAL SPECIFICATION - 1.</b>Material: Specification PSG-248, 100% Cotton Cloth. 2. colour: Cedar Green BCC 80. 3. Print: White. (Suitable Print) 4. Rope: PSG-101, 100% Cotton, dia 1 inch Qty 08 in Number Length 25 feet. 5. Iron Pin: 08 in Number, Length 18 inch, dia 1 ¼ inch. 6. Bamboo: PSG-758 &amp; 759, Qty 06 in Number, Min dia at bottom 3.5 &amp; at top 2.5 inch should be Rot proofed</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											(treated with Preservative) Length 12 feet min with 02 spare . 7. Hammer: 05 Lbs with handle. qty 01 8. Handle material: Kahoo/Sissoo or Teak wood of 2.5 feet length, 9. Eyelets brass: PSG-283 10. Leather: PSG-9 (b) Vegetable tanned Leather Piece insert in between (EYE PIECE) the all Caps for Strengthening. 11. COMPLETE ACCESSORIES: Jhaler : 06 in Nos Ropes : 06 in Nos Nails: 06 in Nos Hammer: 01 in Nos Bamboo: 06 in Nos	
151	DGT101 211	NO DATA AVAILAB LE	010050000001 8 / Ply Wood GD-I, 7 ply (core and inner plies of Poplar. SIZE: L=8', W=4', TH=12MM	SPECEFCATI ON.IM-2581 (E)	2241 / SQ FEET	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - 1. BS-6566 OF 1985. PART 1-8. TYPE-INT. 2. WOOD PRESERVATION AS PER BS-6566,Part-7,appendex A. 3. MOISTURE CONTENT= BS EN 322 : 1993, 4. BONDING QUALITY= BS 314-1 : 2004 AND BS EN 314-2 : 1993, 5. GLUE= BS 1203 : 2001, 6. PRESERVATION= BS 4072 : 1999, 7. PHYSICAL EVALUATION= BS 6566-6 : 1985, 8. DENSITY= BS EN 323 : 1993 GENERAL SPECIFICATION - 1. BS-6566 OF 1985. PART 1-8. TYPE-INT. 2. WOOD PRESERVATION AS PER BS-6566,Part-7,appendex A. 3. MOISTURE CONTENT= BS EN 322 : 1993, 4. BONDING QUALITY= BS 314-1 : 2004 AND BS EN 314-2 : 1993, 5. GLUE= BS 1203 : 2001, 6. PRESERVATION= BS 4072 : 1999, 7. PHYSICAL EVALUATION= BS 6566-6 : 1985, 8. DENSITY= BS EN 323 : 1993	
152	DGT101 277	NO DATA AVAILAB LE	010050000001 8 / Ply Wood GD-I, 7 ply (core and inner plies of Poplar. SIZE: L=8', W=4', TH=12MM	SPECEFCATI ON.IM-2581 (E)	1100 / SQ FEET	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - 1. BS-6566 OF 1985. PART 1-8. TYPE-INT. 2. WOOD PRESERVATION AS PER BS-6566,Part-7,appendex A. 3. MOISTURE CONTENT= BS EN 322 : 1993, 4. BONDING QUALITY= BS 314-1 : 2004 AND BS EN 314-2 : 1993, 5. GLUE= BS 1203 : 2001, 6.	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>PRESERVATION= BS 4072 : 1999, 7. PHYSICAL EVALUATION= BS 6566-6 : 1985, 8. DENSITY= BS EN 323 : 1993 <u>GENERAL SPECIFICATION</u> - 1. BS-6566 OF 1985. PART 1-8. TYPE-INT, 2. WOOD PRESERVATION AS PER BS-6566,Part-7,appendix A. 3. MOISTURE CONTENT= BS EN 322 : 1993, 4. BONDING QUALITY= BS 314-1 : 2004 AND BS EN 314-2 : 1993, 5. GLUE= BS 1203 : 2001, 6. PRESERVATION= BS 4072 : 1999, 7. PHYSICAL EVALUATION= BS 6566-6 : 1985, 8. DENSITY= BS EN 323 : 1993</p>	
153	DGT101 212	NO DATA AVAILAB LE	010000000004 8 / TIMBER SHESHAM SLEEPER WELL SEASONED LOCAL		56 / CUBIC FOOT	NO DATA AVAILAB LE					<p><u>TECHNICAL SPECIFICATION</u> - SIZE: LENGTH= 6-8 FEET WIDTH= 15-17 INCH BREATH= 12-14 INCH iM 2692 (E) OF 1970 and both ends cutting after inspection, desired by inspector PSG-847 MOISTURE CONTENT: 30% (±5%) PARENT EQUIPMENT : GENERAL USE<u>GENERAL SPECIFICATION</u> - SIZE: LENGTH= 6-8 FEET WIDTH= 15-17 INCH BREATH= 12-14 INCH iM 2692 (E) OF 1970 and both ends cutting after inspection, desired by inspector PSG-847 MOISTURE CONTENT: 30% (±5%) PARENT EQUIPMENT : GENERAL USE</p>	
154	DGT101 278	NO DATA AVAILAB LE	010050000008 8 / Ply wood GD-I, 9 ply,	X 19.05 MM )	1212 / SQ FEET	NO DATA AVAILAB LE					<p><u>TECHNICAL SPECIFICATION</u> - 1. Both face and back veneers of Gurjan Wood. 2. Core, and inner plies of poplar 3. size: LengTh= 8', Width=4' &amp; Thickness= 19MM (±2MM) 4. ACCEPTANCE CRITERIA: Plywood, GD-I, 9-Ply, Both face and back veneers of Gurjan-wood, and core and inner plies of poplar. Thickness of Face, Back veneer 0.6mm. 5. TESTING CRITERIA: MOISTURE content Bonding Quality Glue Preservation</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											Physical Evaluation Density. 6. SPECIFICATIONS/STANDARDS density i.e 700 to 850 kilograms per cubic meter for Ply Wood Marine All Shesham GD-II and 550-750 kilograms per cubic meter for Ply Wood Grade-I is acceptable. by end user vide letter: PN/GM (ME Sur) /GENERAL/3870705 dated 17 December 2025 end user: PND 107 w/shopGENERAL SPECIFICATION - 1. Both face and back veneers of Gurjan Wood. 2. Core, and inner plies of poplar 3. size: LengTh= 8', Width=4' & Thickness= 19MM (±2MM) 4. ACCEPTANCE CRITERIA: Plywood, GD-I, 9-Ply, Both face and back veneers of Gurjan-wood, and core and inner plies of poplar. Thickness of Face, Back veneer 0.6mm. 5. TESTING CRITERIA: MOISTURE content Bonding Quality Glue Preservation Physical Evaluation Density. 6. SPECIFICATIONS/STANDARDS density i.e 700 to 850 kilograms per cubic meter for Ply Wood Marine All Shesham GD-II and 550-750 kilograms per cubic meter for Ply Wood Grade-I is acceptable. by end user vide letter: PN/GM (ME Sur) /GENERAL/3870705 dated 17 December 2025 end user: PND 107 w/shop	
155	DGT101 206	NO DATA AVAILABL E	010050000008 8 / Ply wood GD-I, 9 ply.	X 19.05 MM )	1480 / SQ FEET	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - 1. Both face and back veneers of Gurjan Wood. 2. Core, and inner plies of poplar 3. size: LengTh= 8', Width=4' & Thickness= 19MM (±2MM) 4. ACCEPTANCE CRITERIA: Plywood, GD-I, 9-Ply, Both face and back veneers of Gurjan-wood, and core and inner plies of poplar. Thickness of Face, Back veneer 0.6mm. 5. TESTING	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>CRITERIA: MOISTURE content Bonding Quality Glue Preservation Physical Evaluation Density. 6. SPECIFICATIONS/STANDARDS density i.e 700 to 850 kilograms per cubic meter for Ply Wood Marine All Shesham GD-II and 550-750 kilograms per cubic meter for Ply Wood Grade-I is acceptable. by end user vide letter: PN/GM (ME Sur) /GENERAL/3870705 dated 17 December 2025 end user: PND 107 w/shop</p> <p><u>GENERAL SPECIFICATION - 1.</u> Both face and back veneers of Gurjan Wood. 2. Core, and inner plies of poplar 3. size: LengTh= 8', Width=4' &amp; THickness= 19MM (±2MM) 4. ACCEPTANCE CRITERIA: Plywood, GD-I, 9-Ply, Both face and back veneers of Gurjan-wood, and core and inner plies of poplar. Thickness of Face, Back veneer 0.6mm. 5. TESTING CRITERIA: MOISTURE content Bonding Quality Glue Preservation Physical Evaluation Density. 6. SPECIFICATIONS/STANDARDS density i.e 700 to 850 kilograms per cubic meter for Ply Wood Marine All Shesham GD-II and 550-750 kilograms per cubic meter for Ply Wood Grade-I is acceptable. by end user vide letter: PN/GM (ME Sur) /GENERAL/3870705 dated 17 December 2025 end user: PND 107 w/shop</p>	
156	DGT101 283	NO DATA AVAILABL E	010050000002 9 / Ply wood, Marine All Shesham, 13- Ply, GD-II, (WBP, Treated with Preservative) Size: L=8FT,		50 / SQ FEET	NO DATA AVAILAB LE					<p><u>TECHNICAL SPECIFICATION - 1.</u> density of plywood marine: may be 560 kgs per cubic meter 2. bs 1088 part i &amp; ii. 3. DENSITY OF TIMBER SHEESHAM= 560 KGS PER CUBIC METER</p> <p><u>GENERAL SPECIFICATION - 1.</u> density of plywood marine: may be 560 kgs per cubic meter 2. bs 1088 part i &amp; ii. 3. DENSITY OF</p>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabilty	Tender Remarks	TECH / GEN SPECS	Dimension
			W=4FT, TH=25MM, (Core inner plies & veneer) (Wood Should be all Shesham)								TIMBER SHEESHAM= 560 KGS PER CUBIC METER	
157	DGT971 65	NO DATA AVAILABL E	933070507970 4 / PLASTIC FORMICA DULL COLOUR OFF WHITE SIZE 8'X4', THICKNESS 1.50mm		17 / SHEET						<u>TECHNICAL SPECIFICATION - NO DATA AVAILABLE</u> <u>GENERAL SPECIFICATION - NO DATA AVAILABLE</u>	
158	DGD101 335	NO DATA	732070501242 6 / MACHINE ATTA KNEADING100 TO120KG CAPACITY 440V 50HZ 3PHS 5AMP		1 / EACH/N UMBER	GSA/23/A KM					<u>TECHNICAL SPECIFICATION - Make/Model/Brand/GSA/23/AKM 100-120 kg Capacity, 440 Volts Material of Tub Stainless Steel (Food Grade)</u> <u>GENERAL SPECIFICATION - Make/Model/Brand/GSA/23/AKM 100-120 kg Capacity, 440 Volts Material of Tub Stainless Steel (Food Grade)</u>	
159	DGE101 068	BS 419/156	055954600536 2 / TAPE INSULATING BIAS WIDTH 0.500IN TH 0.01IN LENGTH 50.0 MTR		55 / ROLL						<u>TECHNICAL SPECIFICATION - NO DATA AVAILABLE</u> <u>GENERAL SPECIFICATION - NO DATA AVAILABLE</u>	
160	DGD992 18		003550000045 7 / UTENSIL COOKING ALUMINUM ALLOY WITH COVER (O/D 20 to 22", HEIGHT 10 to 12", THICKNESS 10 SWG		2 / EACH/N UMBER	NO DATA AVAILAB LE					<u>TECHNICAL SPECIFICATION - FOOD GRADE ALUMINUM ALLOY 100% FREE FROM LEAD (PB) AND CADMIUM (CD), ALUMINUM GRADE 3003. NO BREAKAGE/ BENT. O/D x 20 to 22", height x 10 to 12", thickness x 10 SWG</u> <u>GENERAL SPECIFICATION - FOOD GRADE ALUMINUM ALLOY 100% FREE FROM LEAD (PB) AND CADMIUM (CD), ALUMINUM GRADE 3003. NO BREAKAGE/ BENT. O/D x 20 to 22",</u>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											height x 10 to 12", thickness x 10 SWG	
161	DGE97708	NO DATA AVAILABLE	055978000018 1 / SLEEVE PLASTIC RED 0.5X10 59P (NSD/TD/19/334 DT:15.05.93		35 / METER	NO DATA AVAILABLE					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
162	DGE97709	NO DATA AVAILABLE	055978000018 5 / SLEEVE PLASTIC		40 / ROLL	NO DATA AVAILABLE					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
163	DGE98069		8305PK512416 7 / FABRIC CURTAIN WITH FITTING (MOAWIN A&A)	SENIOR OFFICER CABIN	3 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
164	DGB101201		451070512320 1 / BATH MIXER WALL TYPE WITH UNIVERSAL SHOWER (MUSLIM BIB COCK		2 / EACH/NUMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
165	DGE101270	5012568166895	402099396075 3 / ROPE FIBROUS, POLYESTER/ PROPYLENE MIX, 08-STRAND, DIA: 40MM		440 / METER						TECHNICAL SPECIFICATION - SPECIFICATION: 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO-10556. 2. 40-MM DIA BLACK BERTHING POLYESTER/ PROPYLENE MIX, 8-STRAND MOORING NUMBER-5, MBL 26.4 TONNES, MB-67 TABLE-3, 3.8, PLAIN ENDS UV STABILISED ISO 9554 of 2019. 3. STANDARD ACCORDANCE TO ISO 2307 PACKAGING. 4. STANDARD OF MANUFACTURE ISO 2307 OF 2019 5. CONFIRMATION OF STANDARD EN-ISO 2307 OF 2019. 6. 220 METER PER COILS. 7. CERTIFICATIONS: VALID LLOYD TEST CERTIFICATE REQUIRED INDICATION BATCH/LOT NUMBER	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											<p>OF IDENTIFICATION AND WORKING / BREAKING AND STRENGTH OF STORES. 8. SUPPLY FIRM SHALL OBTAIN AND FURNISH MANUFACTURE CERTIFICATE TO PN AS SAME QUALITY/ STANDARD AS BEING PROVIDED TO MoD (UK)/ RN/ RELATED COUNTRY. 9. ROPE ARE TO BE SUPPLIED WITH VALID LLOYD'S/ BSI/ IACS MEMBER SOCIETY CERTIFICATION. 10. OEM ADDRESS: MARLOW ROPES LTD HAILSHAM EAST SUSSEX UNITED KINGDOM Phone: +44(0) 1323444444 EMAIL: sales@marlowropes.com <u>GENERAL SPECIFICATION</u> - SPECIFICATION:</p> <p>1. TO BE COMPLY WITH THE SPECIFICATION OF ISO-10556. 2. 40-MM DIA BLACK BERTHING POLYESTER/ PROPYLENE MIX, 8-STRAND MOORING NUMBER-5, MBL 26.4 TONNES, MB-67 TABLE-3, 3.8, PLAIN ENDS UV STABILISED ISO 9554 of 2019. 3. STANDARD ACCORDANCE TO ISO 2307 PACKAGING. 4. STANDARD OF MANUFACTURE ISO 2307 OF 2019 5. CONFIRMATION OF STANDARD EN-ISO 2307 OF 2019. 6. 220 METER PER COILS. 7. CERTIFICATIONS: VALID LLOYD TEST CERTIFICATE REQUIRED INDICATION BATCH/LOT NUMBER OF IDENTIFICATION AND WORKING / BREAKING AND STRENGTH OF STORES. 8. SUPPLY FIRM SHALL OBTAIN AND FURNISH MANUFACTURE CERTIFICATE TO PN AS SAME QUALITY/ STANDARD AS BEING PROVIDED TO MoD (UK)/ RN/ RELATED COUNTRY. 9. ROPE ARE TO BE SUPPLIED WITH VALID</p>	


S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
											LLOYD'S/ BSI/ IACS MEMBER SOCIETY CERTIFICATION. 10. OEM ADDRESS: MARLOW ROPES LTD HAILSHAM EAST SUSSEX UNITED KINGDOM Phone: +44(0) 1323444444 EMAIL: sales@marlowropes.com	
166	DGE97842	MIL-I-46552	5970001771627 / TAPE INSULATION ELECTRICAL NOMINAL WD 1.5		4 / ROLL	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - PVC TAPE OSAKA Tape insulation electrical ADHES plastic BLK WD 19 mm thickness 0.2mm GENERAL SPECIFICATION - PVC TAPE OSAKA Tape insulation electrical ADHES plastic BLK WD 19 mm thickness 0.2mm	
167	DGE101065		9330705300654 / telic sheet (TRANSPARENT sheet) THICKNESS: 0.35MM WIDTH:54 INCH LENGTH: 25-30 meter		300 / SQ FEET	sheet					TECHNICAL SPECIFICATION - null GENERAL SPECIFICATION - null	
168	DGH98704		6145706332829 / electrical cable 30mm 4 core flexible cu/ pvc/ pvc.		50 / METER	4 CORE FLEXIBLE CABLE					TECHNICAL SPECIFICATION - ELECTRICAL CABLE 30MM 4 CORE FLEXIBLE CU/ PVC/ PVC GENERAL SPECIFICATION - ELECTRICAL CABLE 30MM 4 CORE FLEXIBLE CU/ PVC/ PVC	
169	DGB101248	HME-AB-UNI-FERROL-20MM-003	4730705351236 / union connector ferrol type dia 20mm		40 / EACH/NUMBER	SS304 SURFACE					TECHNICAL SPECIFICATION - UNION CONNECTOR TYPE FERROL DIA 20MM material stainless steel GENERAL SPECIFICATION - UNION CONNECTOR TYPE FERROL DIA 20MM material stainless steel	
170	DGE98083	os-dl3-24w	6210705246119 / flat panel light - LED		4 / EACH/NUMBER	os-dl3-24w					TECHNICAL SPECIFICATION - null GENERAL SPECIFICATION - null	
171	DGB101209	XT10/209822	3455725280806 / CUTTING DISC RHODIUS XT10 SIZE		20 / EACH/NUMBER	RHODIUS TOPLINE					TECHNICAL SPECIFICATION - MATERIAL SPECIFICATIONS: STAINLESS STEEL, RUST AND ACID PROOFED STEELS, HIGH TENSILE, HIGH ALLOYED STEELS,	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			105x1x16								TOOL STEELS, HARDENED STEELS, HARDOX, HIGH TENSILE METAL SHEETSGENERAL SPECIFICATION - MATERIAL SPECIFICATIONS: STAINLESS STEEL, RUST AND ACID PROOFED STEELS, HIGH TENSILE, HIGH ALLOYED STEELS. TOOL STEELS, HARDENED STEELS, HARDOX, HIGH TENSILE METAL SHEETS	
172	DGE99275	NIL	035059923712 6 / ROPE NYLON ,CIRC 2", DIA: 16-MM, HAWSERLAID, 3-sTRAND, Z- LAY, 120 FM PER COIL,	STRENGTH 5.200 TONS UNIT OF AVAILABILITY	240 / FATHO M						TECHNICAL SPECIFICATION - SPECIFICATION OF ITEM 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM WILL PROVIDED TEST CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WILL BE PROVIDED BY OEM. 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S/BSI TEST CERTIFICATE REQUIRED AS PER ISO 2307 OF 2019. GENERAL SPECIFICATION - SPECIFICATION OF ITEM 1. TO BE COMPLY WITH THE SPECIFICATION OF ISO 1140-2021, 2. TO BE MANUFACTURED/ MARKING AND LABELING OF THE ROPES IN ACCORDANCE WITH ISO 9554: 2019, 3. ROPE ARE REQUIRED TO BE TESTED AS PER ISO 2307 OF 2019, 4. OEM	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											WILL PROVIDED TEST CERTIFICATE OF RAW MATERIALS I.E DESCRIPTION OF MATERIAL AND SPECIFICATIONS OF MATERIAL, 5. OEM COC REQUIRED, 6. FURNISH CALIBRATION CERTIFICATE WIL BE PROVIDED BY OEM, 7. OEM OF ROPE MUST BE APPROVED BY MOD (UK)/RN/RELATED COUNTRY, 8. LENGTH PER COIL: 120 FATHOM. 9. VALID LLOYD'S/BSI TEST CERTIFICATE REQUIRED AS PER ISO 2307 OF 2019.	
173	DGE72194	NIL	8020999430559 / PAINT BRUSH, SIZE=4-INCH		157 / EACH/NUMBER	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - NO DATA AVAILABEGENERAL SPECIFICATION - NO DATA AVAILABLE	
174	DGE99210	NO DATA AVAILAB LE	0461500000086 / GOGGLE CHIPPING		2 / EACH/NUMBER	NO DATA AVAILAB LE					TECHNICAL SPECIFICATION - Concurrence to CSA Resistance to fogging for Resistance to fogging for use outdoors.Medium Energy Impact: Resists a 6mm; 0.86g at 120 m/s. Resistance to surface damage by fine particles. Liquid droplet protection. Protection against large dust particles at >5 microns Large enough to fit over prescription glasses. Shields the user against gas and fine dust particles of 5 microns in size. Resistant to molten metal and hot solids. Should be suitable for use around high speed particles at extreme temperatures One-size-fits - most along with fire- resistant head band.GENERAL SPECIFICATION - Concurrence to CSA Resistance to fogging for Resistance to fogging for use outdoors.Medium Energy Impact: Resists a 6mm; 0.86g at 120 m/s. Resistance to surface damage by fine particles. Liquid droplet protection. Protection against large dust particles at >5 microns Large	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
											enough to fit over prescription glasses. Shields the user against gas and fine dust particles of 5 microns in size. Resistant to molten metal and hot solids. Should be suitable for use around high speed particles at extreme temperatures One-size-fits - most along with fire- resistant head band.	
175	DGE981 20		533000244019 2 / SHEET RUBBER SOLID 0.125 X24X324 INCH		80 / FOOT						<u>TECHNICAL SPECIFICATION - MILR900</u> GENERAL SPECIFICATION - MILR900	
176	DGE983 03		492072517605 4 / REGULATOR WITH OCTOPUS (COMPLETE SET)	DIVING	2 / EACH/N UMBER	PSS DIVE		GERMANY		GERMAN Y	<u>TECHNICAL SPECIFICATION - MAKE/ BRAND: AQUA LUNG (USA/ FRANCE/ GERMANY) DETAILS OF COMPLETE SET: (A) CALYPSO REGULATOR QC DIN CONNECTION (PART No. 128710), (B) OCTOPUS CALYPSO QC 2ND STAGE (PART No. 128560), (C) COMBO ELEMENTS (PG 300B+DEPTH GUAGE) (PART No. 525330), (D) DIRECT SYSTEM LP HOSE (PART No. 840182)</u> <u>GENERAL SPECIFICATION - MAKE/ BRAND: AQUA LUNG (USA/ FRANCE/ GERMANY) DETAILS OF COMPLETE SET: (A) CALYPSO REGULATOR QC DIN CONNECTION (PART No. 128710), (B) OCTOPUS CALYPSO QC 2ND STAGE (PART No. 128560), (C) COMBO ELEMENTS (PG 300B+DEPTH GUAGE) (PART No. 525330), (D) DIRECT SYSTEM LP HOSE (PART No. 840182)</u>	
177	DGE767 02	3M 9332	4240TY520254 0 / 3M DISPOSABLE RESPIRATOR COMFORT SERIES (3M 9332)	SAFETY 8833	150 / EACH/N UMBER	8833		3M			<u>TECHNICAL SPECIFICATION - EN 149.2001+A1.2009 FFP2 NRD DUST MIST USAGE UP TO 50XTLV</u> <u>GENERAL SPECIFICATION - EN 149.2001+A1.2009 FFP2 NRD DUST MIST USAGE UP TO 50XTLV</u>	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
178	DGE76871	NO DATA AVAILABE	0461590006480 / PAINT ROLLER, LENGTH= 7-INCH, DIA= 2-INCH, C/W SHEEP SKIN COVER AND HANDLE STEEL FRAME, WOODEN HANDLE	BLST PAINT UNDER WATER HULL	64 / EACH/NUMBER						<p><u>TECHNICAL SPECIFICATION - a.</u> Item Name : Paint Roller 7" b. Roller Size : 7 inches c. Roller Cover : Cover with Polyamide d. Frame : Chrome Steel e. Handle : PVC/ Wooden Handle for maximum grip</p> <p><u>GENERAL SPECIFICATION - a.</u> Item Name : Paint Roller 7" b. Roller Size : 7 inches c. Roller Cover : Cover with Polyamide d. Frame : Chrome Steel e. Handle : PVC/ Wooden Handle for maximum grip</p>	
179	DGE99057	NIL	0413599238916 / SHEET RUBBER SOLID NATURAL BLACK LENGTH 6 FT, WIDTH 48 INCH, THICKNESS: 0.188 INCH	.HARDNESS RATING:62-70, TENSILE STRENGTH: 14 MPQ 2000 PSI, COMPOUND CLASSIFICATION: Z 14	10 / KILOGRAMME						<p><u>TECHNICAL SPECIFICATION - SHEET RUBBER BLACK LENGTH= 6 FEET WIDTH= 48 INCH THICKNESS= 0.188 INCH APPROX WIGHT= 1.50LBS PER SQ FEET REPLACING DEXINE MATERIAL. COMPOUND CLASSIFICATION- Z 60. HARDNESS AFTER VULCANIZATION (IRHD): 60+5-4) TENSILE STRENGTH: 17 (MPA) MINIMUM BS-1154 OF 1992 COMPOUND CLASSIFICATION- Z 60 ADVANCE SAMPLE TO BEAPPROVED BY CINS SPECS UPDATED VIDE IND NO 2211205 DT 12-08-22</u></p> <p><u>GENERAL SPECIFICATION - SHEET RUBBER BLACK LENGTH= 6 FEET WIDTH= 48 INCH THICKNESS= 0.188 INCH APPROX WIGHT= 1.50LBS PER SQ FEET REPLACING DEXINE MATERIAL. COMPOUND CLASSIFICATION- Z 60. HARDNESS AFTER VULCANIZATION (IRHD): 60+5-4) TENSILE STRENGTH: 17 (MPA) MINIMUM BS-1154 OF 1992 COMPOUND CLASSIFICATION- Z 60 ADVANCE SAMPLE TO BEAPPROVED BY CINS SPECS UPDATED VIDE IND NO 2211205 DT 12-08-22</u></p>	

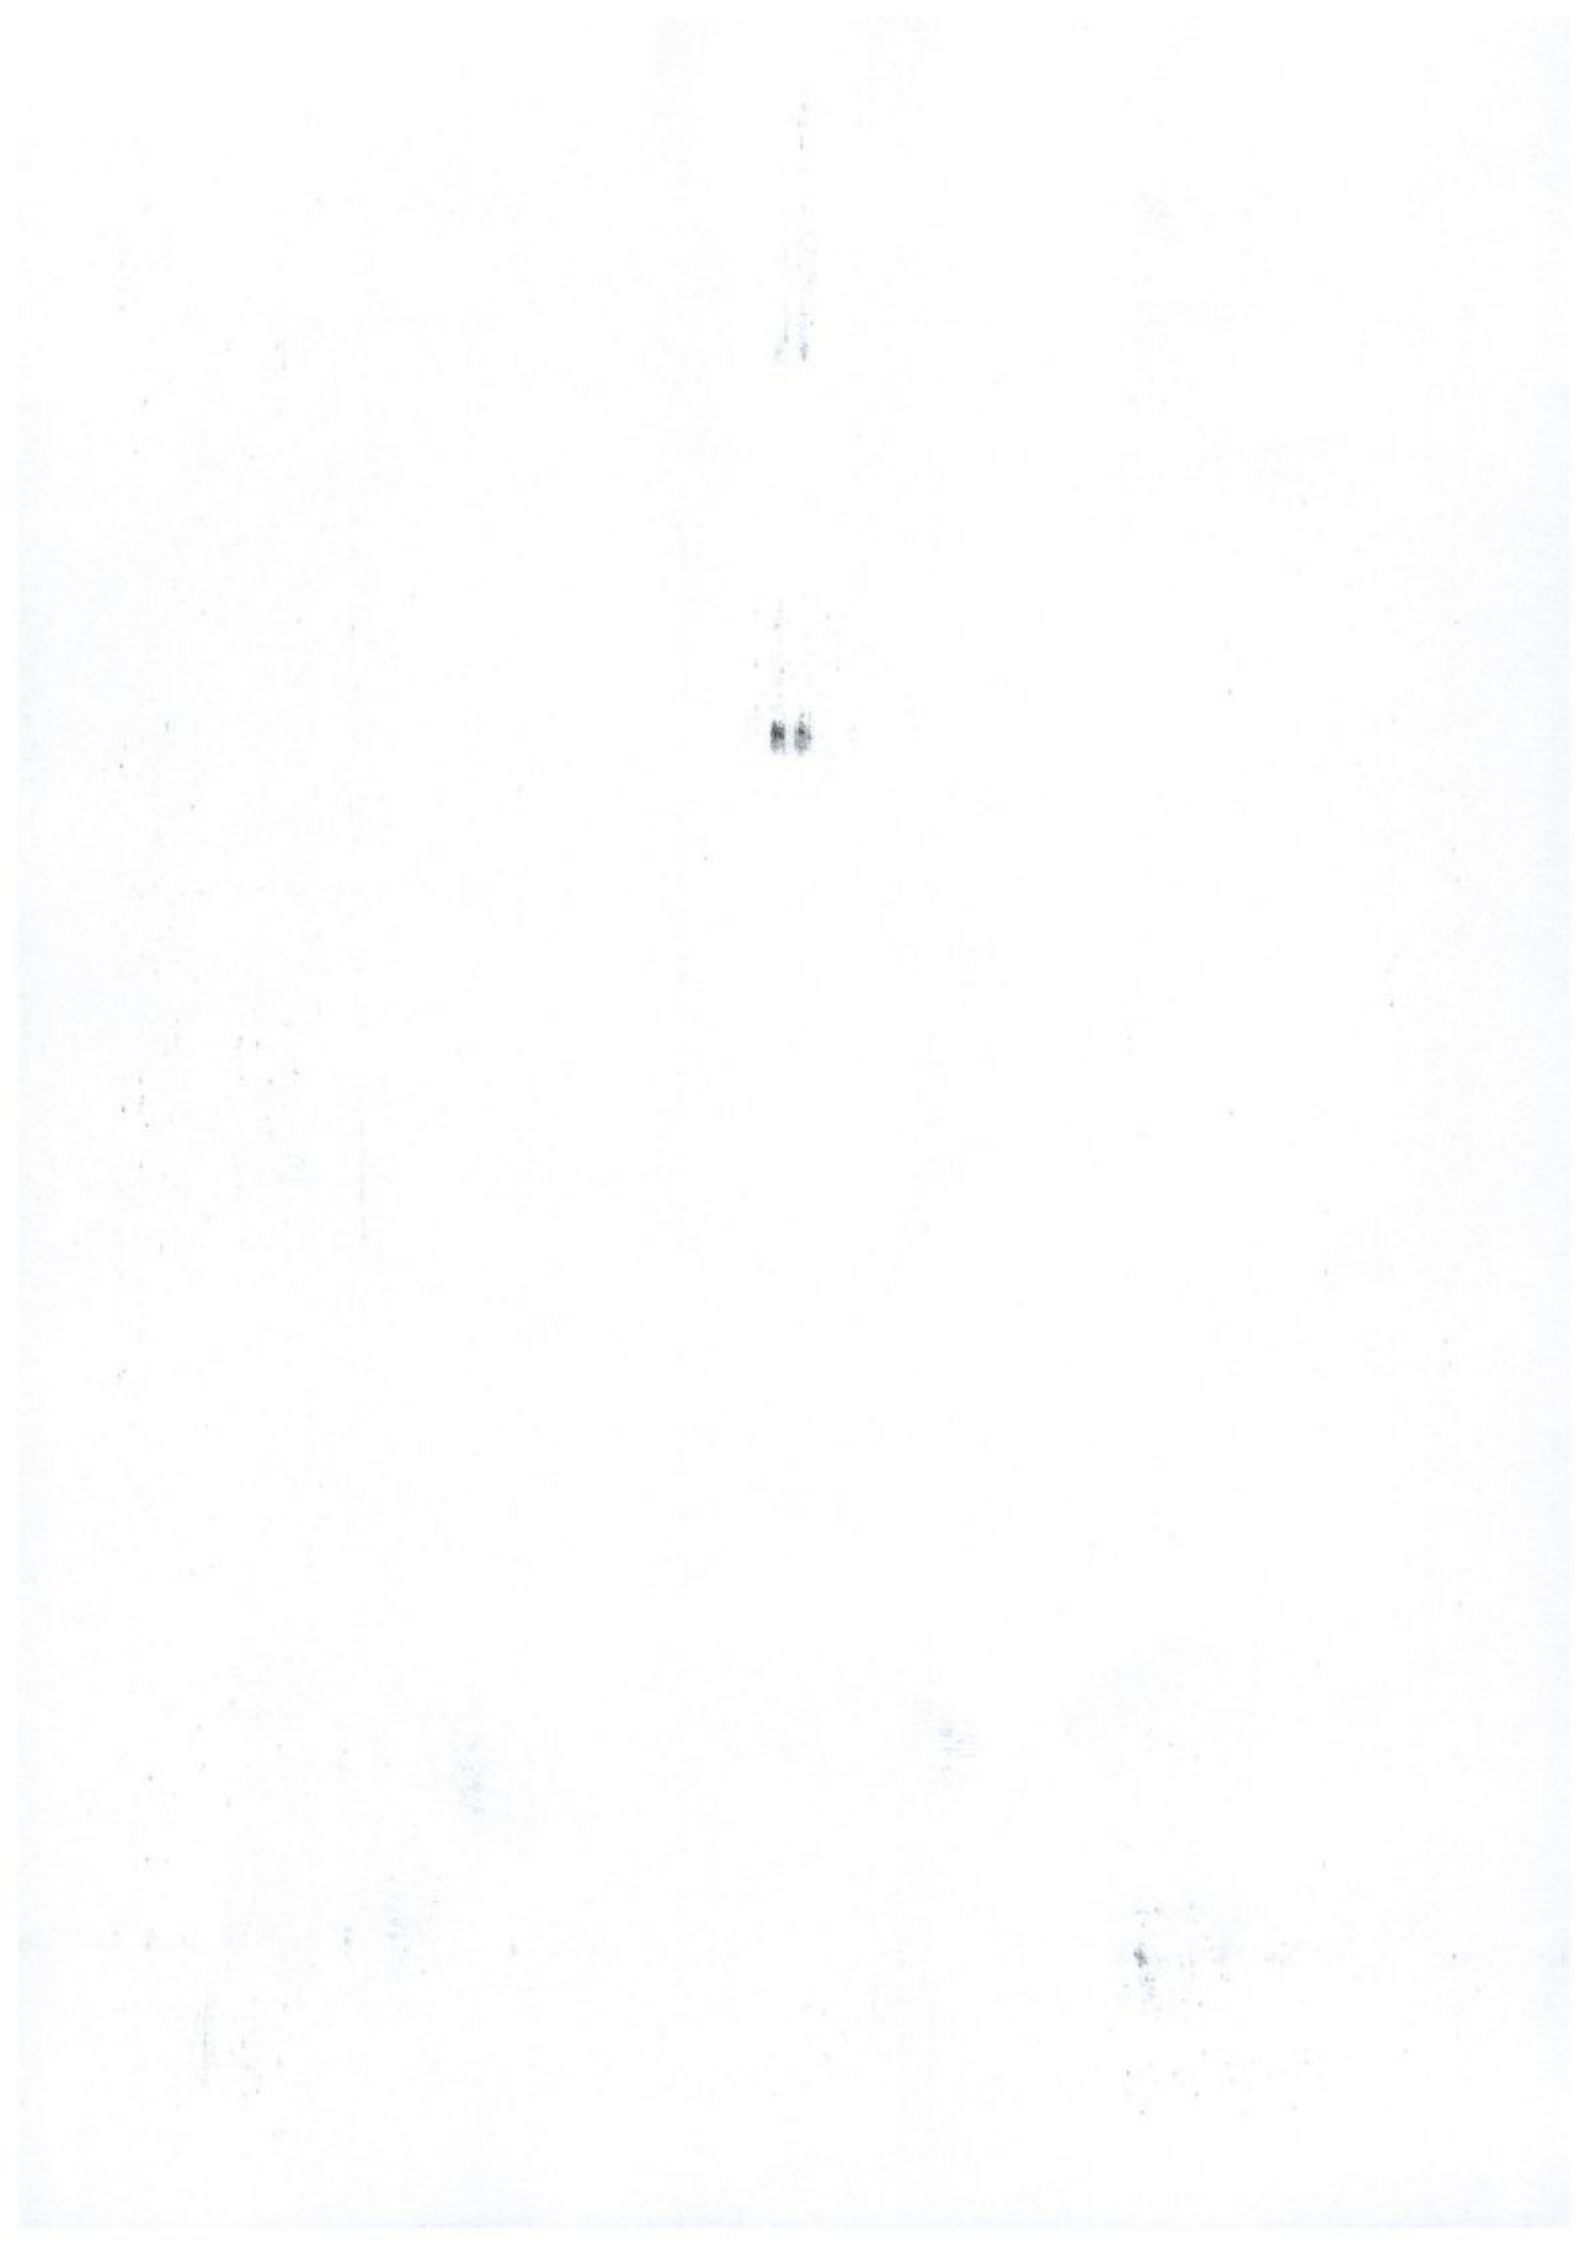

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
180	DGB994 51	NO DATA AVAILABL E	021470941006 4 / SCREW MACHINE UNC STEEL BLACK HEX HD SZ 1.250X0.625IN	BR 320D/78	30 / EACH/N UMBER	BR 320 D/1978					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
181	DGB994 50	NO DATA AVAILABL E	021470941006 5 / SCREW MACHINE UNC STEEL BLACK HEX HD SZ 1.500X0.625IN	BR 320D/78	6 / EACH/N UMBER	BR 320 D/1978					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
182	DGB994 52	NO DATA AVAILABL E	021470941006 6 / SCREW MACHINE UNC STEEL BLACK HEX HD SZ 1.500X0.750IN	BR 320D/78	9 / EACH/N UMBER	BR 320 D/1978					TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
183	DGE959 26		033059571326 2 / TWINE NYLON ROPING 3 STRD NATURAL FINISH MIN BKG STRGT 50 LB		30 / KILOGR AMME						TECHNICAL SPECIFICATION - a. Material: Nylon b. Color: White, Red, Green, Blue c. Style: Twisted d. Line Weight: Light e. Item diameter: 1.5 mm f. Size: 1.5mm x 219 yards g. Min Breaking Strength: 23 KG h. General Specs: Rot Proofed. GENERAL SPECIFICATION - a. Material: Nylon b. Color: White, Red, Green, Blue c. Style: Twisted d. Line Weight: Light e. Item diameter: 1.5 mm f. Size: 1.5mm x 219 yards g. Min Breaking Strength: 23 KG h. General Specs: Rot Proofed.	
184	DGH990 72	SJ401 MAKITA	322076529236 1 / Variable speed Scroll saw 16"		1 / EACH/N UMBER	makita sj 401					TECHNICAL SPECIFICATION - THROAT 16" (406 MM) BLADE LENGTH 5"(125 MM) GENERAL SPECIFICATION - THROAT 16" (406 MM) BLADE LENGTH 5"(125 MM)	
185	DGB994 91		021470003356 6 / SCREW MACHINE BSW STEEL HEX HD SZ 1.000X0.750IN		20 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availabili ty	Tender Remarks	TECH / GEN SPECS	Dimension
186	DGB992 25	NO DATA AVAILABL E	021470124029 2 / WASHER FLAT ROUND NOMINAL 0.50IN	SPEC. DGS/XCII/103/ 46	31 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
187	DGB990 19	CHC 38 (6350-99-411-9601)	025159411960 1 / SHIP BELL BRASS MADE WATCH 45 POUNDS		1 / EACH/N UMBER						TECHNICAL SPECIFICATION - oem/cOUNTRY of Origin already UK oem coc or mtc : any local supplier GENERAL SPECIFICATION -_oem/cOUNTRY of Origin already UK oem coc or mtc : any local supplier	
188	DGE995 84	C-134	085158000007 6 / DEFENCER EAR C-134 62TD		5 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
189	DGE990 03	NO DATA AVAILABL E	055999923462 8 / PHASC TAP PVC (G)	INSULATION AND MARKING TAPE	7 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
190	DGH978 95		403000373102 0 / SHAKLE2" OPENWD2.5" TO2.750" INSIDE-495" TO05.5" MATERIA DIA1.625	GENERAL USE	8 / EACH/N UMBER						TECHNICAL SPECIFICATION - NO DATA AVAILABLE GENERAL SPECIFICATION - NO DATA AVAILABLE	
191	DGB101 685	24340	951570523177 6 / STEEL PANNELING SHEET (STAINLESS STEEL), SIZE 8 X 4 (FEET), Thickness SWG 22 (22 Gauge), Material Grade 304	ships galley (officer washroom)	15 / SHEET	Pakistran	Nil	Umair Brothers street # 10 , Abu Bakr Siddique colony, opposite new khan, Band Road LAHORE contact # 0321-8400118 Office # 042-37465031	Umair Brothers		TECHNICAL SPECIFICATION - THICKNESS SWG 22 (22 GAUGE), MATERIAL GRADE 304, Size 8 x 4 (feet) GENERAL SPECIFICATION - THICKNESS SWG 22 (22 GAUGE), MATERIAL GRADE 304, Size 8 x 4 (feet)	
192	DGB101 640	24340	951570523177 6 / STEEL PANNELING SHEET (STAINLESS	ships galley (officer washroom)	15 / SHEET	Pakistran	Nil	Umair Brothers street # 10 , Abu Bakr Siddique colony, opposite new khan, Band Road LAHORE contact # 0321-8400118	Umair Brothers		TECHNICAL SPECIFICATION - THICKNESS SWG 22 (22 GAUGE), MATERIAL GRADE 304, Size 8 x 4 (feet) GENERAL SPECIFICATION - THICKNESS SWG 22 (22 GAUGE),	

S. No	LPR No	PART NO	NSN / Description	P/Equipment	QTY / DENO	Model	SR NO OF PR	MANUF ADO	Availability	Tender Remarks	TECH / GEN SPECS	Dimension
			STEEL), SIZE 8 X 4 (FEET). Thickness SWG 22 (22 Gauge). Material Grade 304					Office # 042-37465031			MATERIAL GRADE 304, Size 8 x 4 (feet)	
193	DGD101704	ss-1000-ls	7340705101873 / LUNCH TRAY STAINLESS STEEL 4 COMPARTMENT PLATES DINNER MESS PLATES	MESS UTENSILS, OFFICER WARD PNS SHIFA	250 / EACH/NUMBER						TECHNICAL SPECIFICATION - 280 X 220X40MM WEIGHT: 760 ± 5 GRAM. PACKING: NORMAL. MATERIAL: STAINLESS STEEL NON MEGNATIC. BRAND/OEM: KT TRADE IMPLEX AS PER STOCK SAMPLE GENERAL SPECIFICATION - 280 X 220X40MM WEIGHT: 760 ± 5 GRAM. PACKING: NORMAL. MATERIAL: STAINLESS STEEL NON MEGNATIC. BRAND/OEM: KT TRADE IMPLEX AS PER STOCK SAMPLE	
194	DGB101741	24340	9515705231776 / STEEL PANNELING SHEET (STAINLESS STEEL), SIZE 8 X 4 (FEET). Thickness SWG 22 (22 Gauge). Material Grade 304	ships galley (officer washroom)	15 / SHEET	Pakistan	Nil	Umair Brothers street # 10 , Abu Bakr Siddique colony, opposite new khan, Band Road LAHORE contact # 0321-8400118 Office # 042-37465031	Umair Brothers		TECHNICAL SPECIFICATION - THICKNESS SWG 22 (22 GAUGE), MATERIAL GRADE 304, Size 8 x 4 (feet) GENERAL SPECIFICATION - THICKNESS SWG 22 (22 GAUGE), MATERIAL GRADE 304, Size 8 x 4 (feet)	